

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):


- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

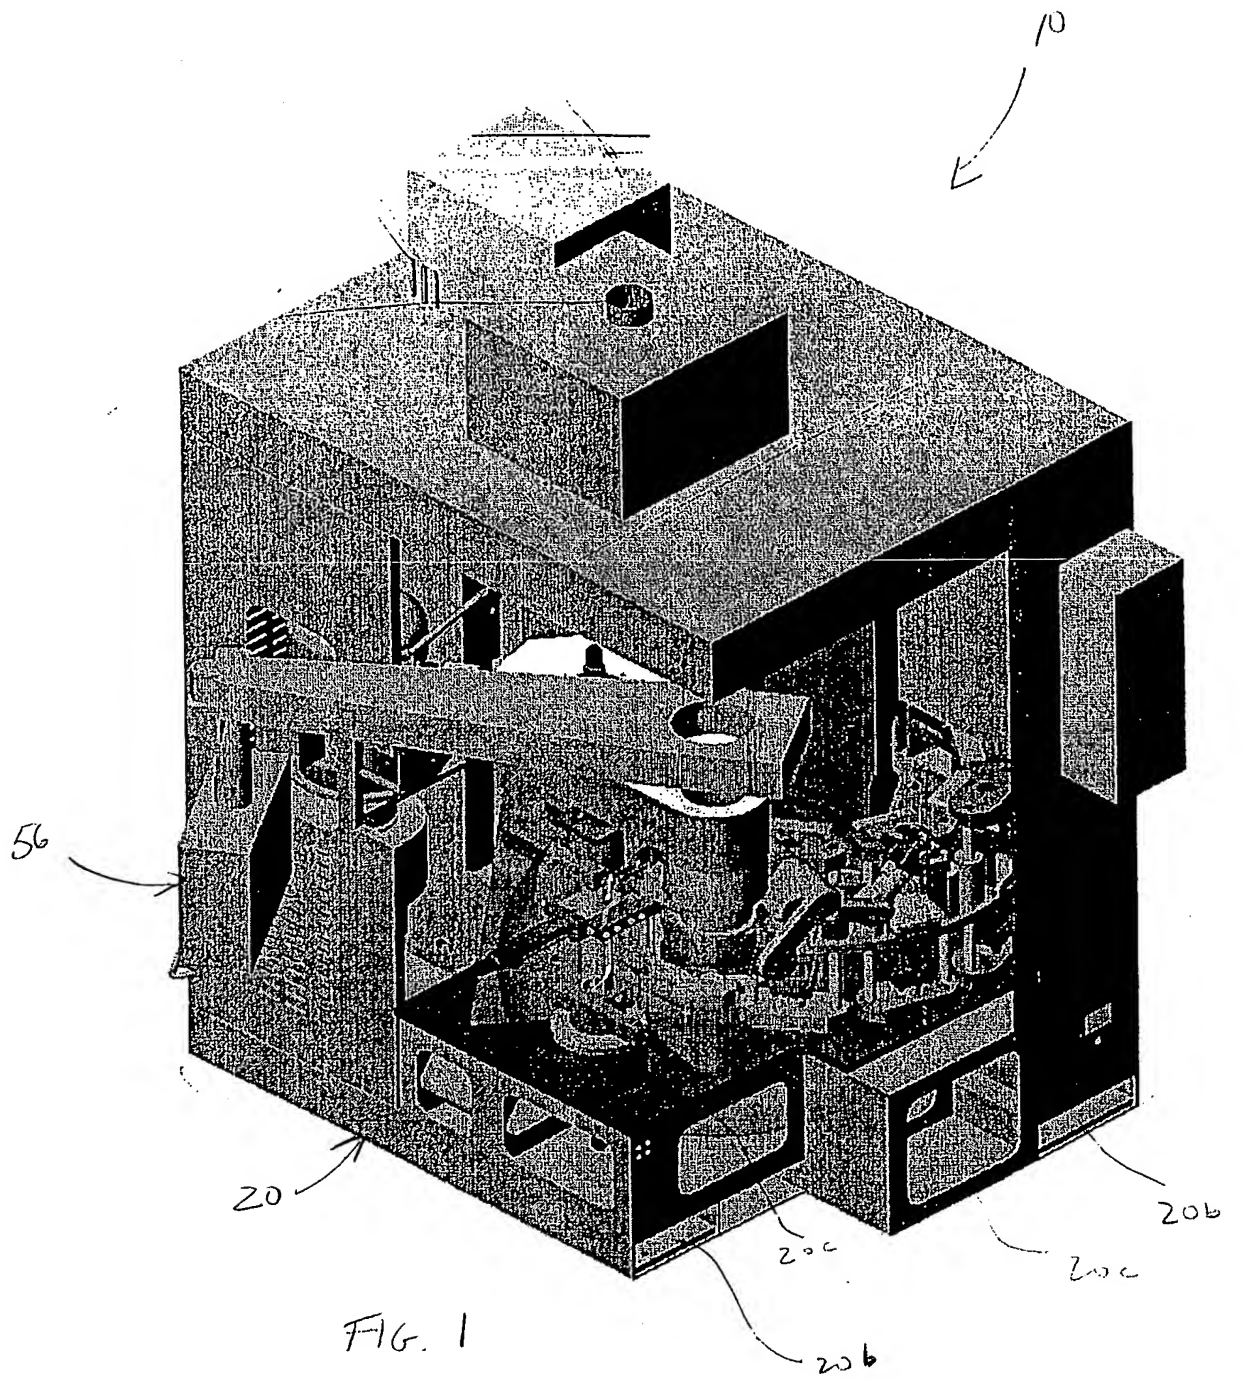

10

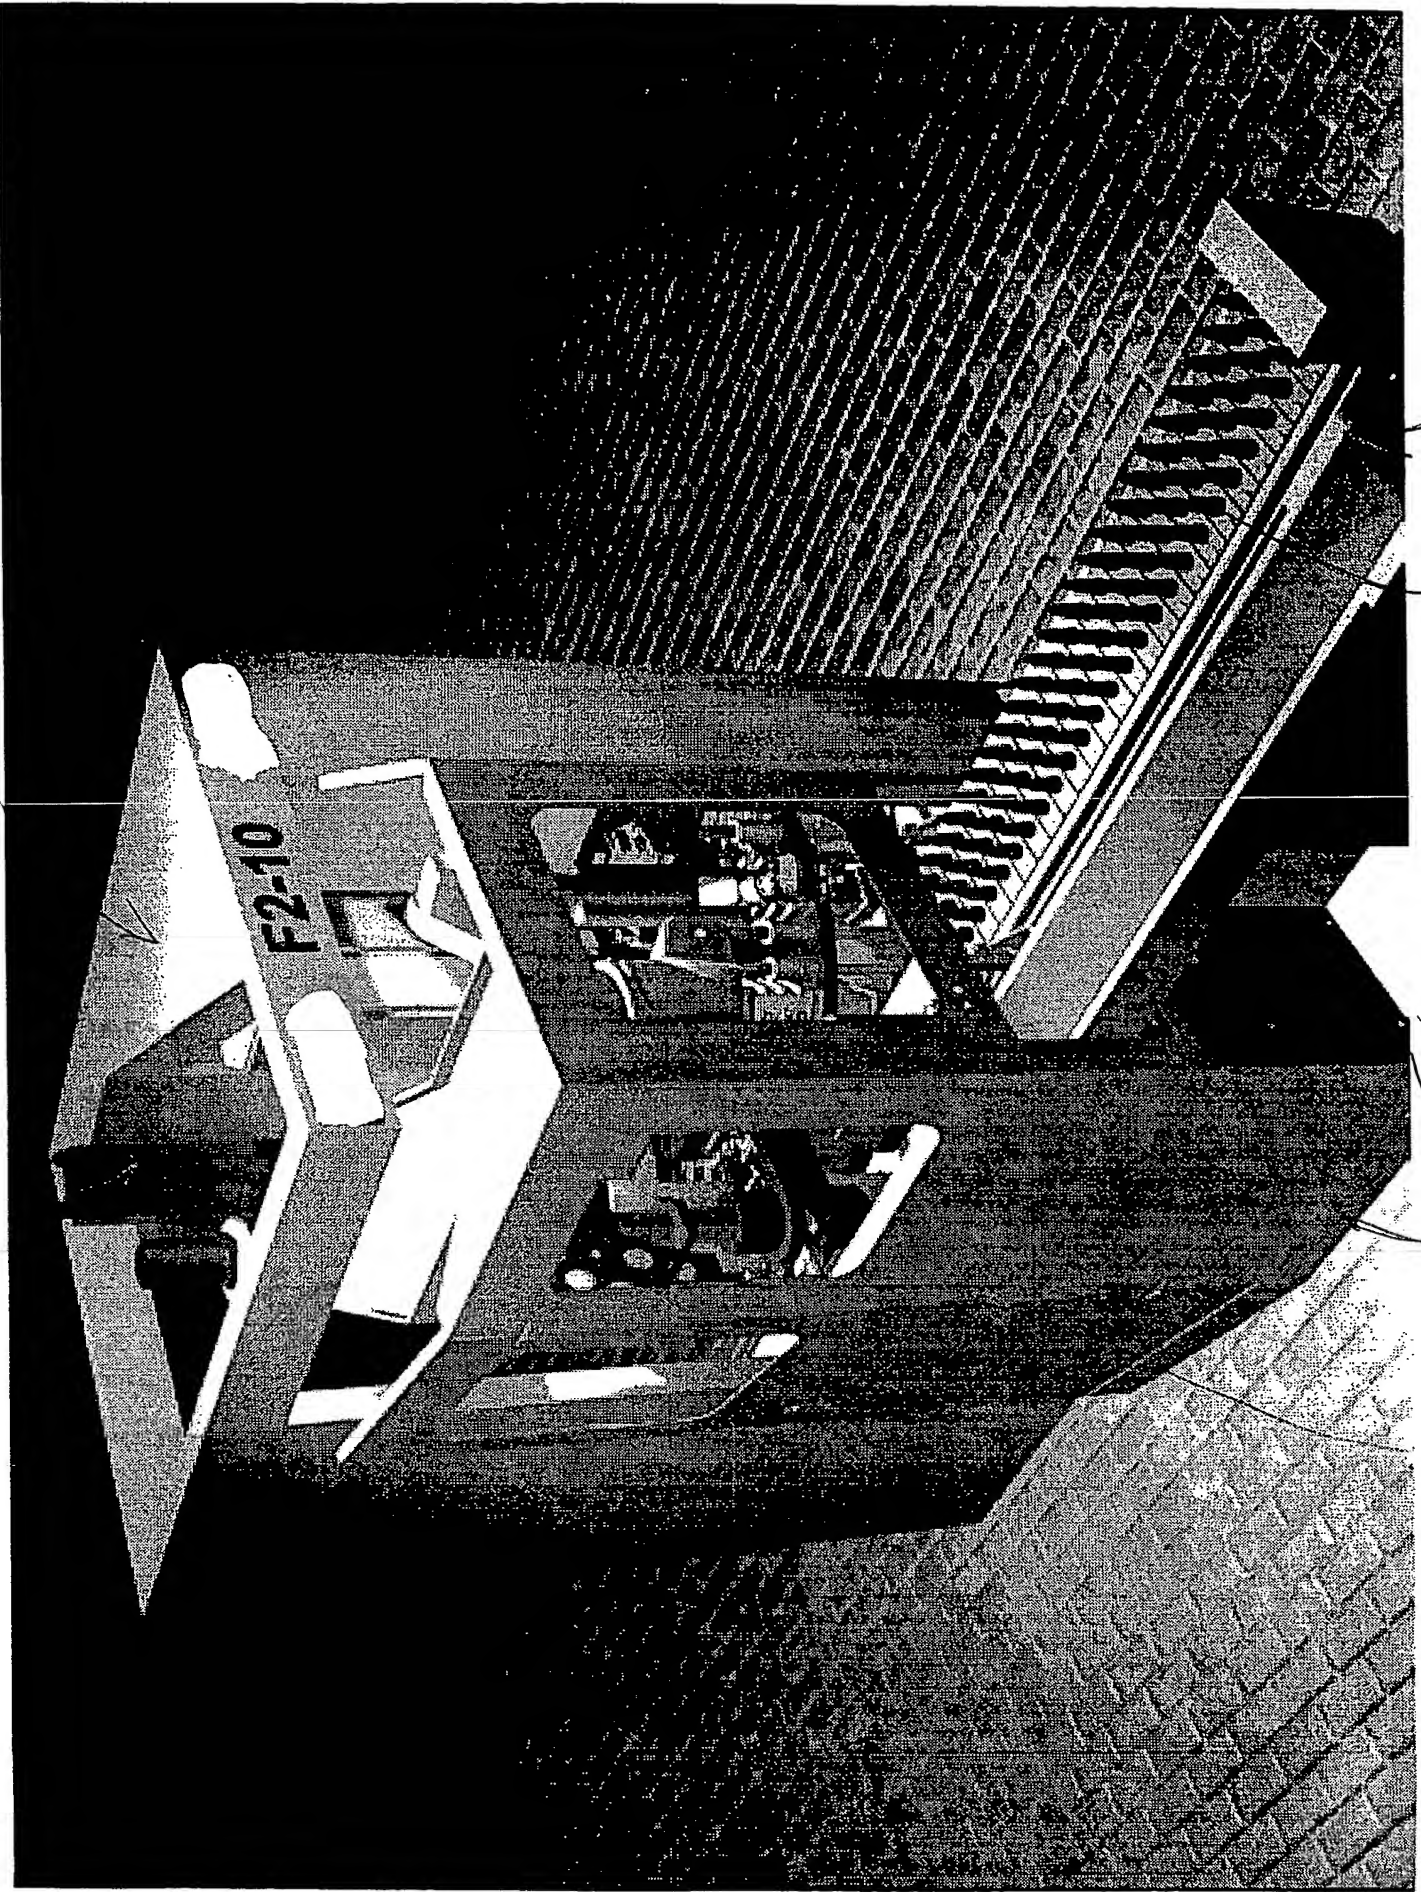

PS

W

F16-2

20

20f

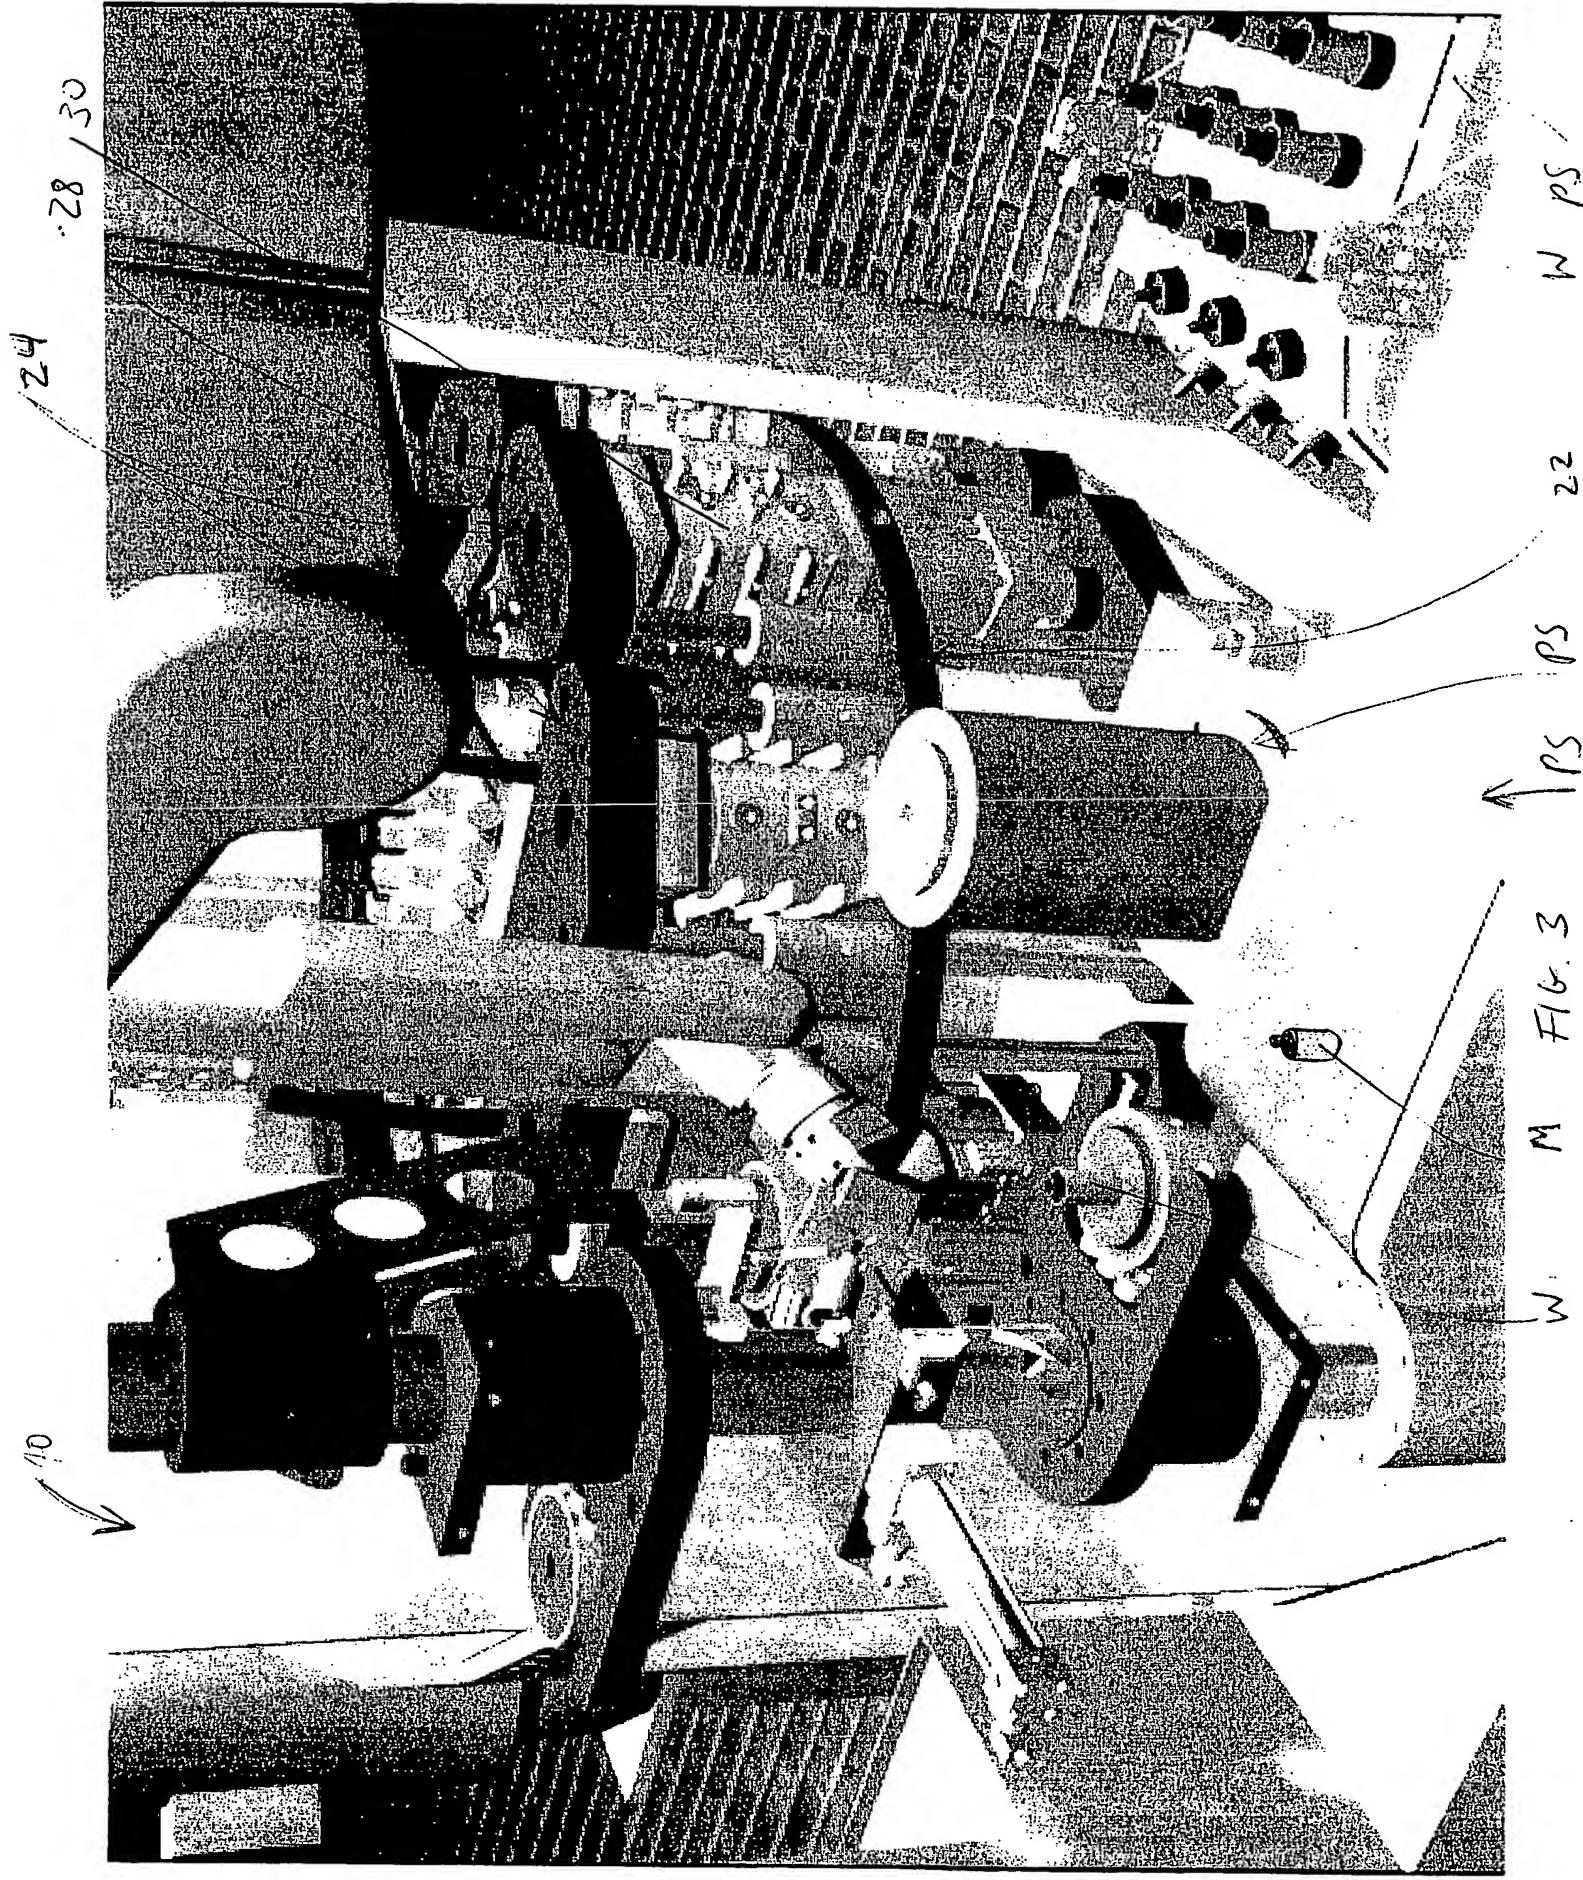


FIG. 3

M

W

PS

PS

PS

PS

PS

PS

PS

PS

PS

PS

PS

PS

PS

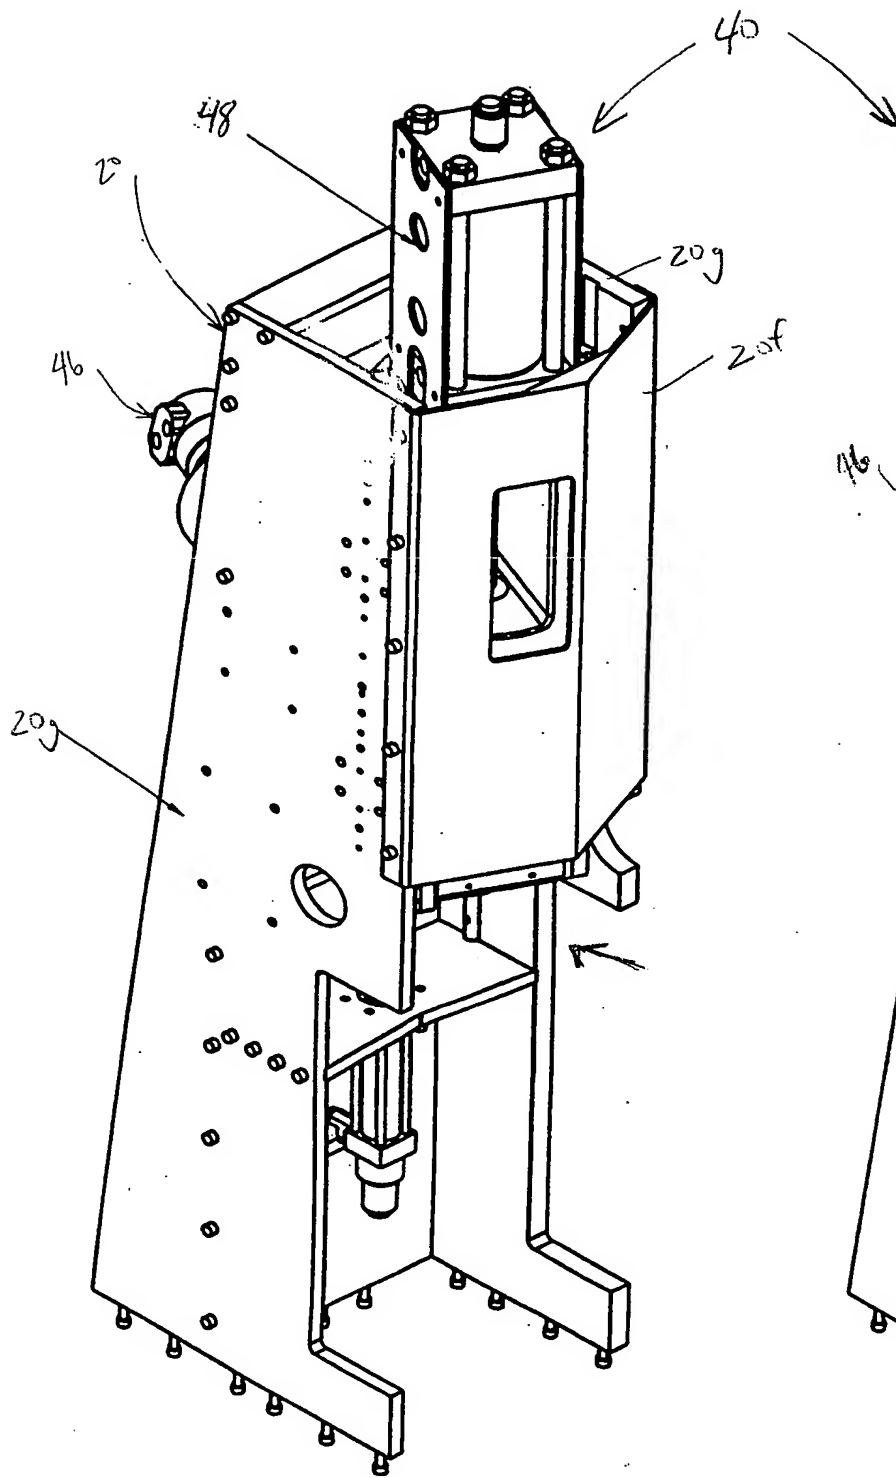


FIG. 4A

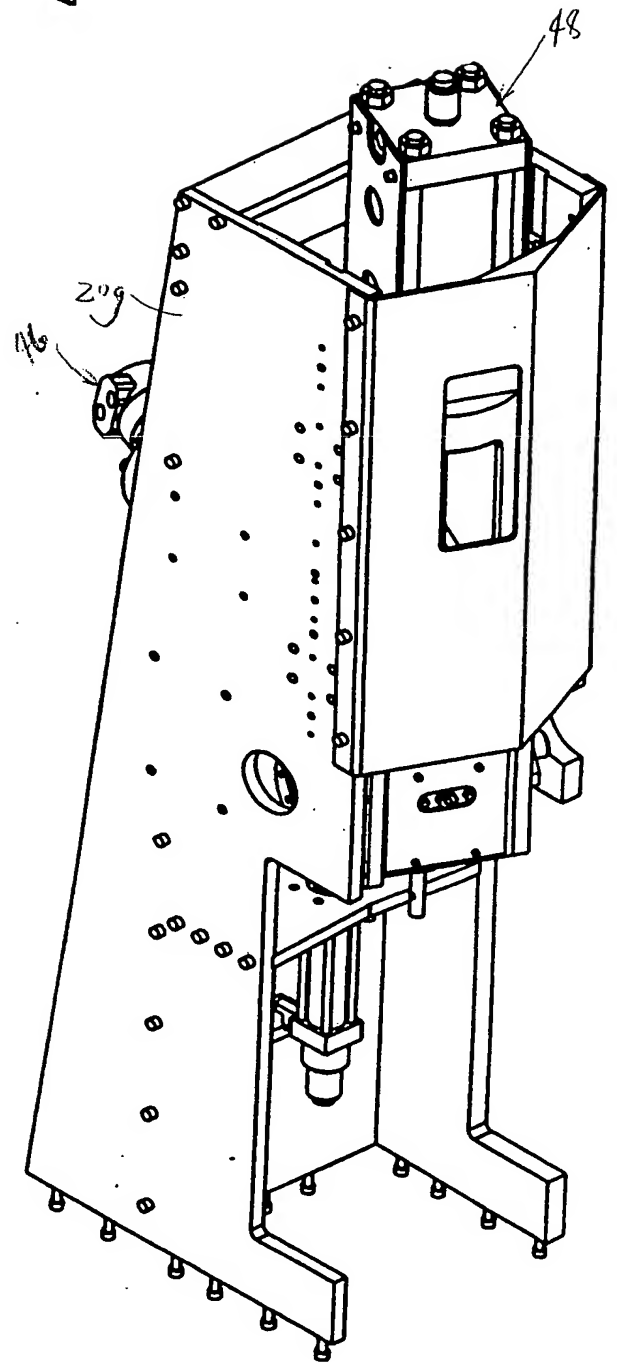


FIG. 4B

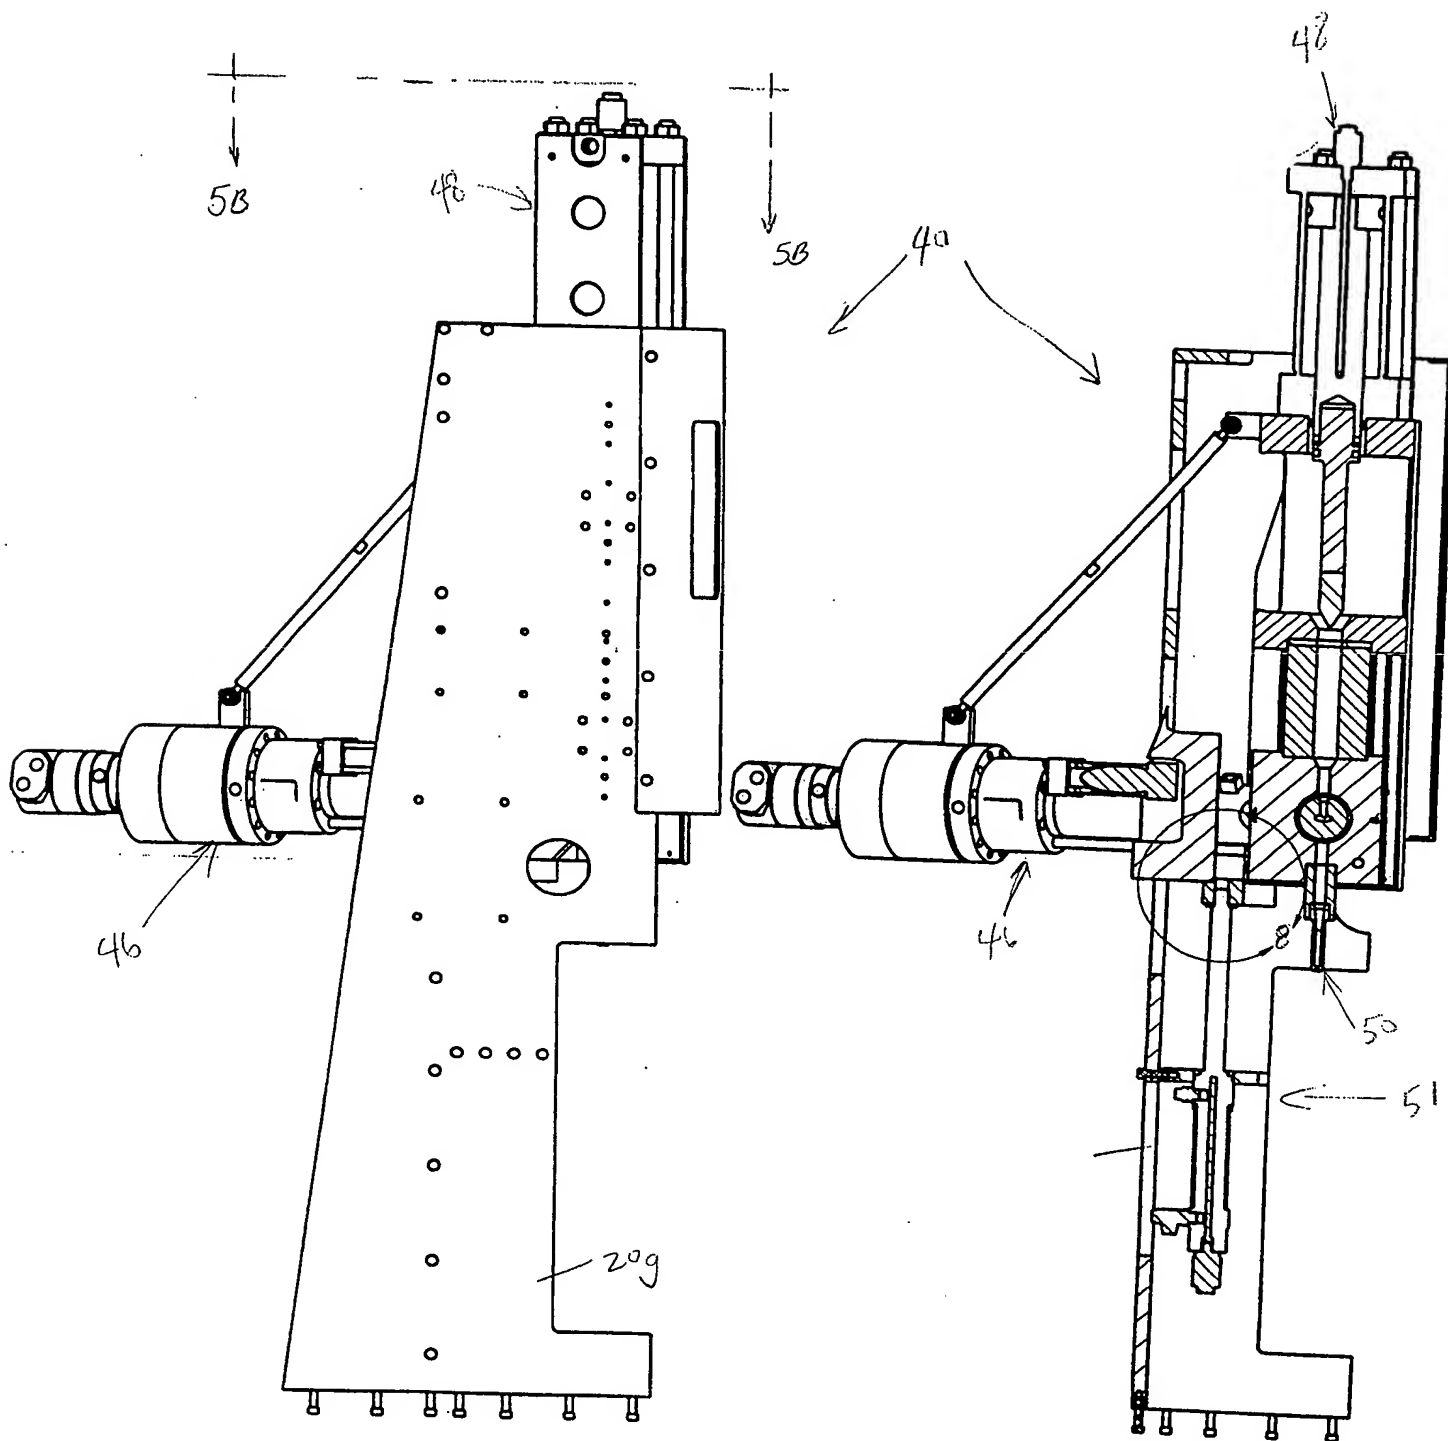


FIG. 5

FIG. 7

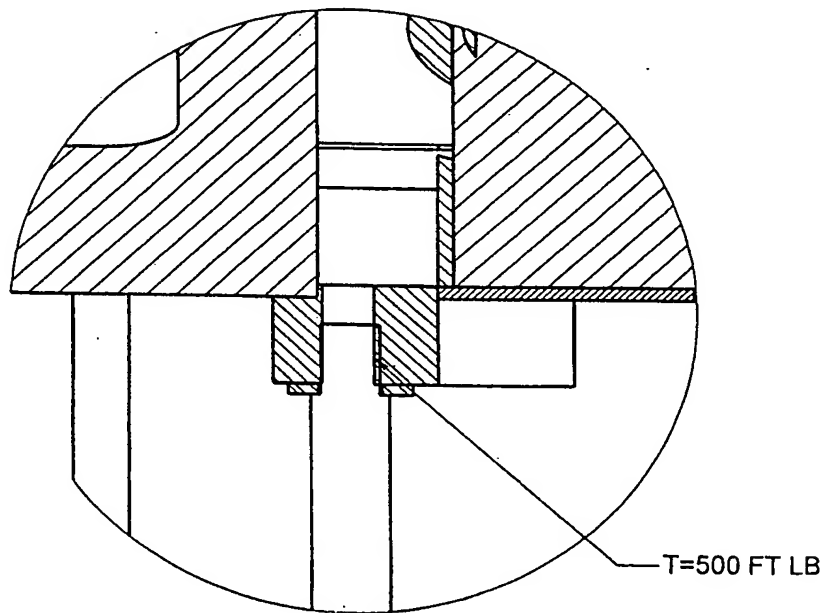
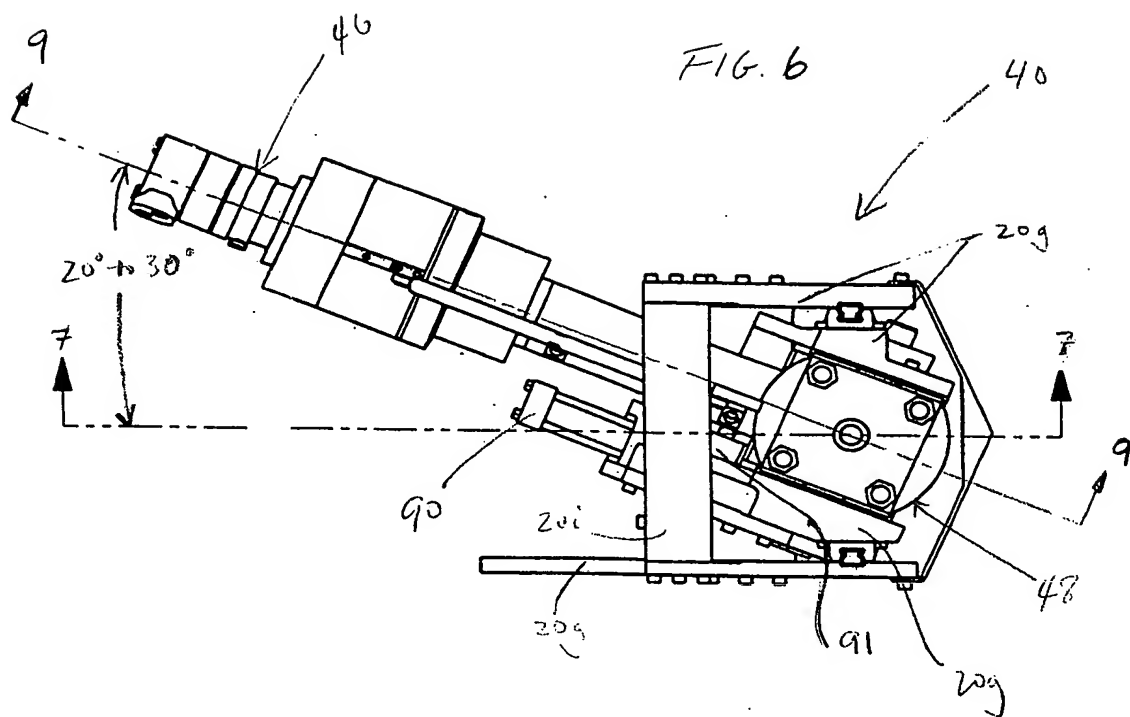
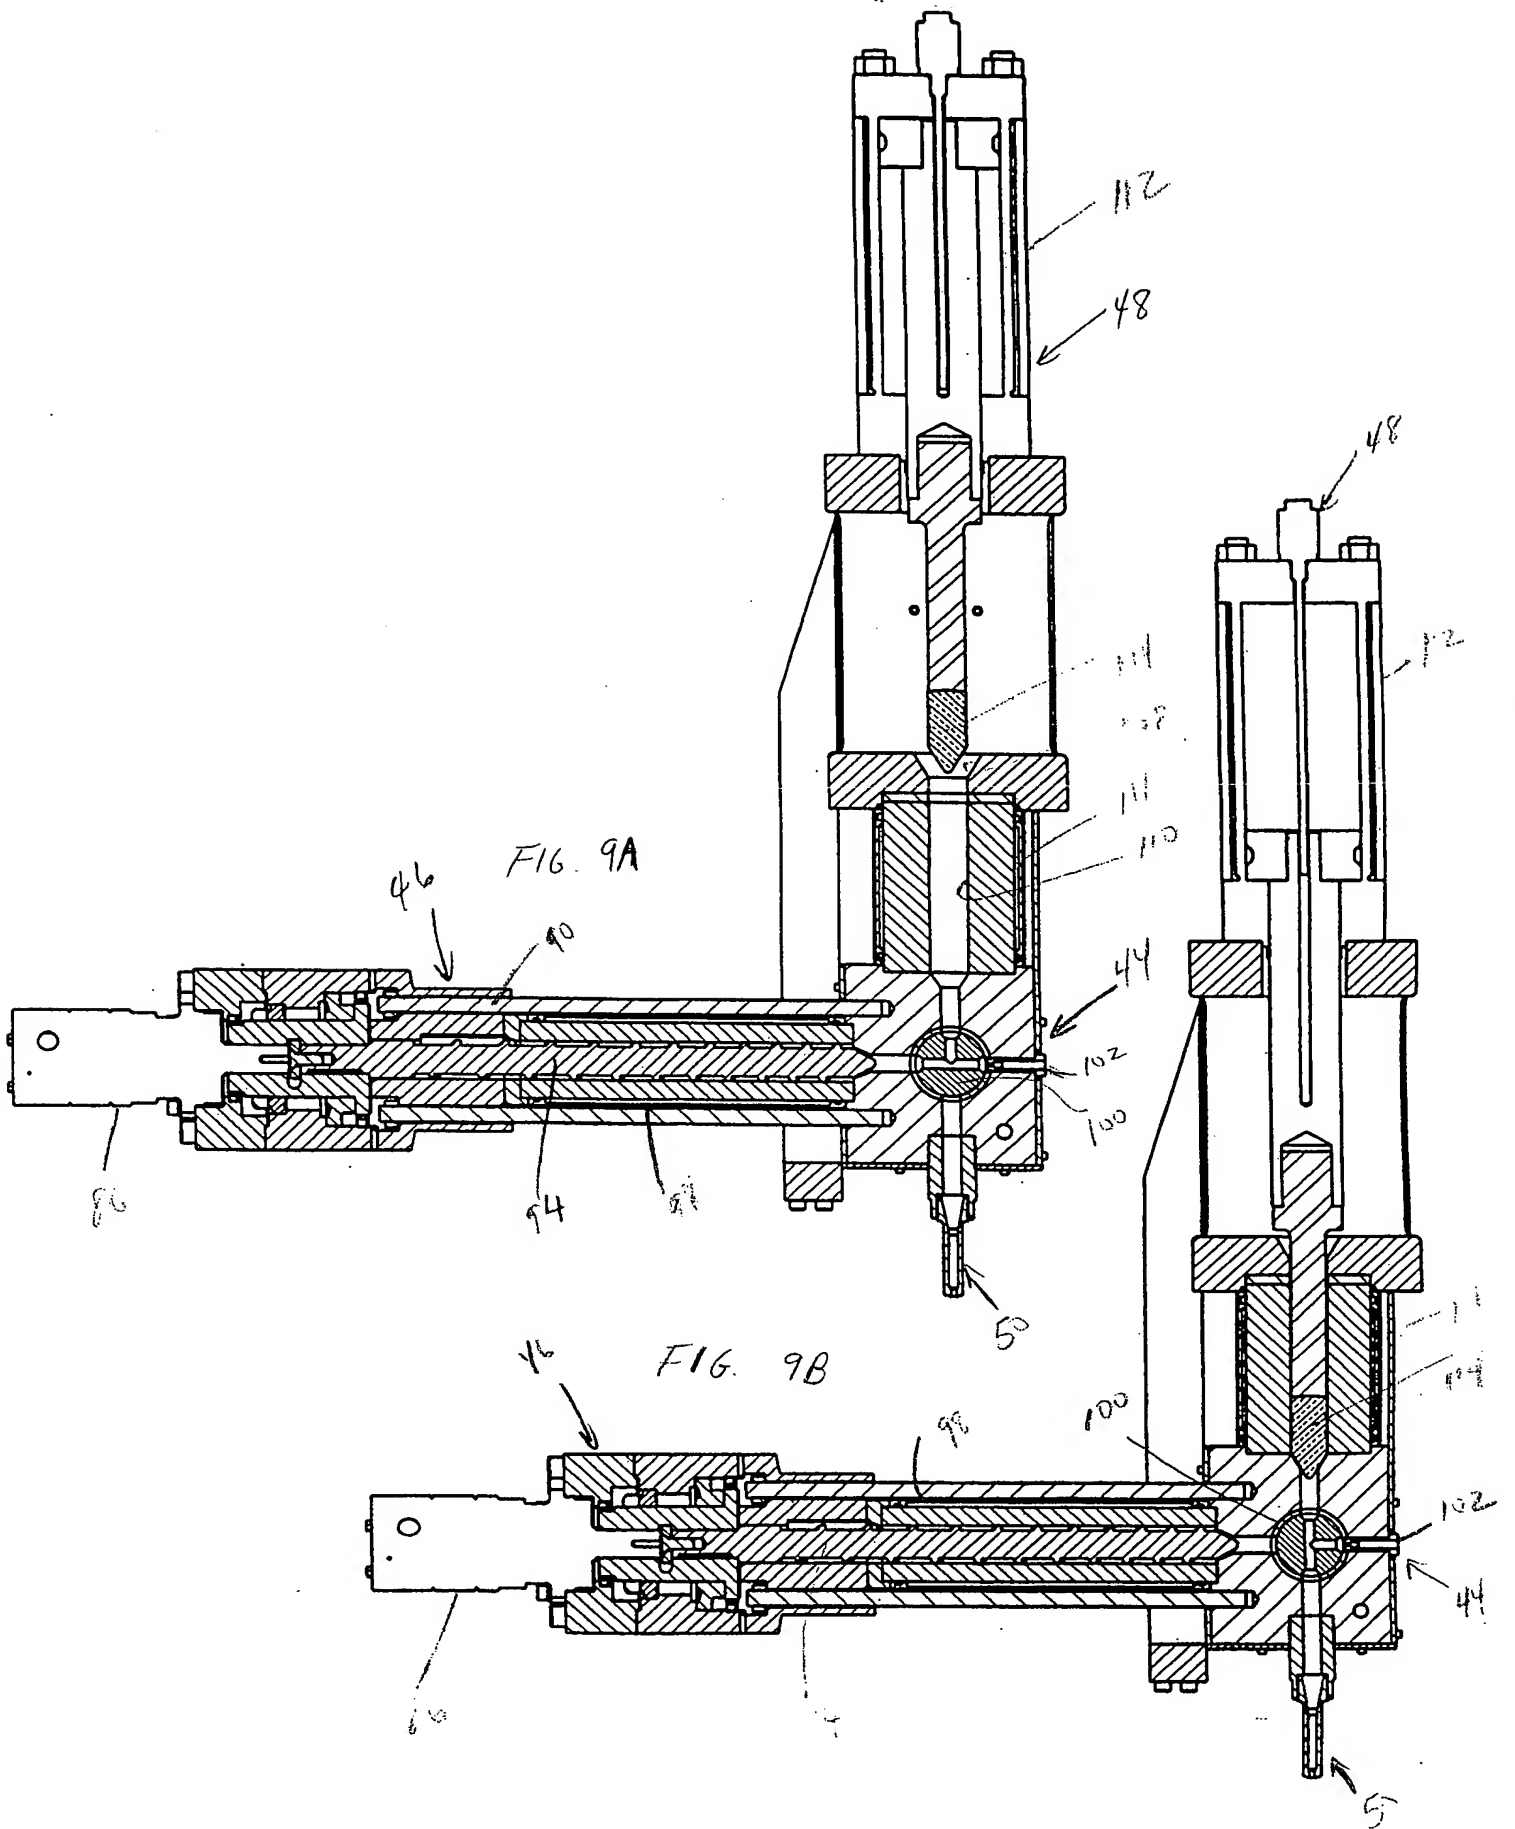


FIG. 8



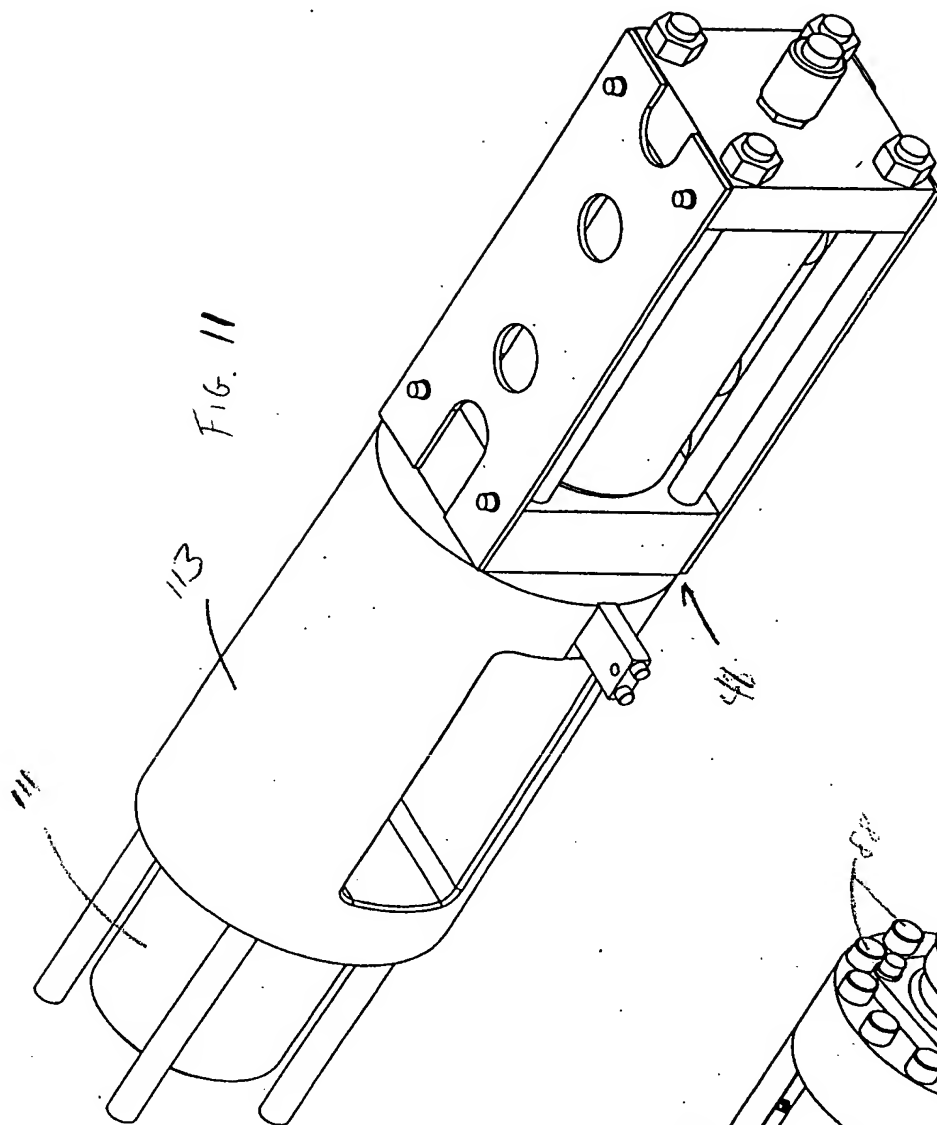
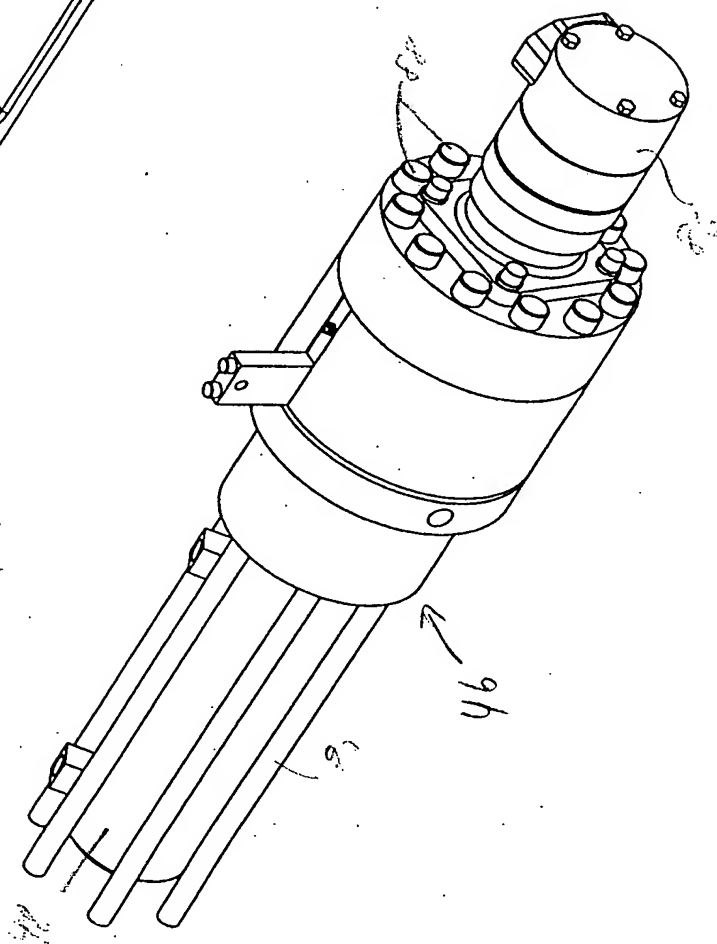


FIG. 10



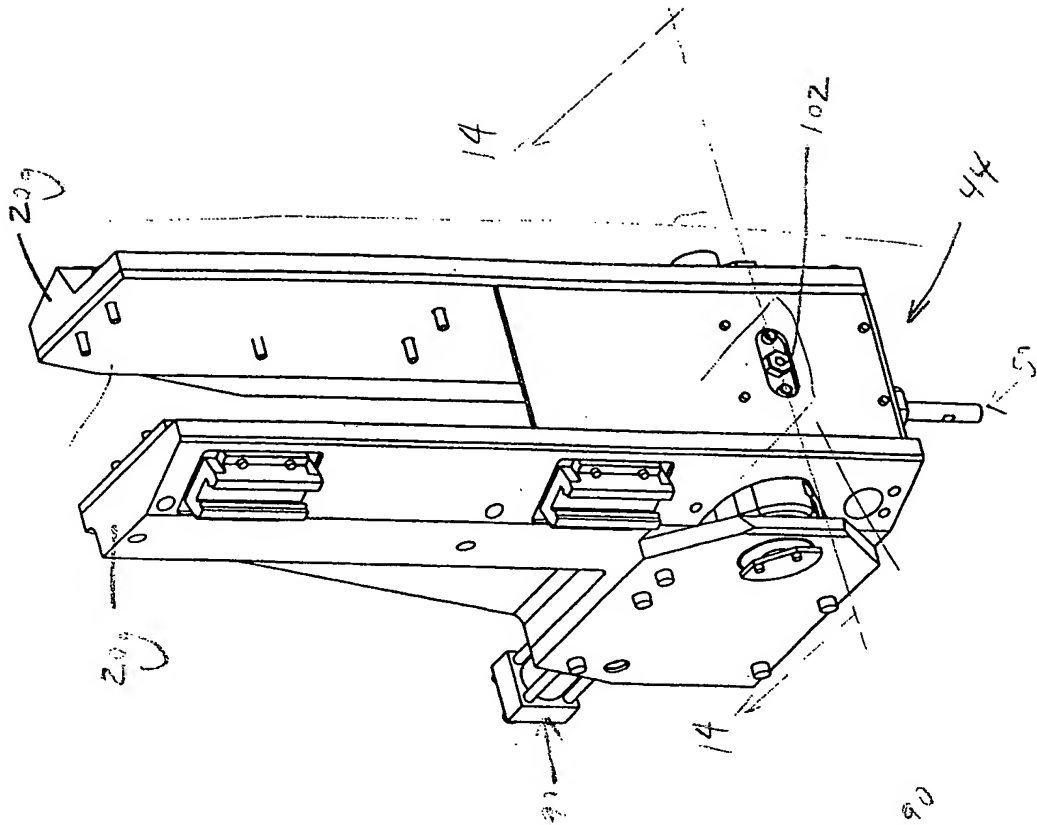


FIG. 12B

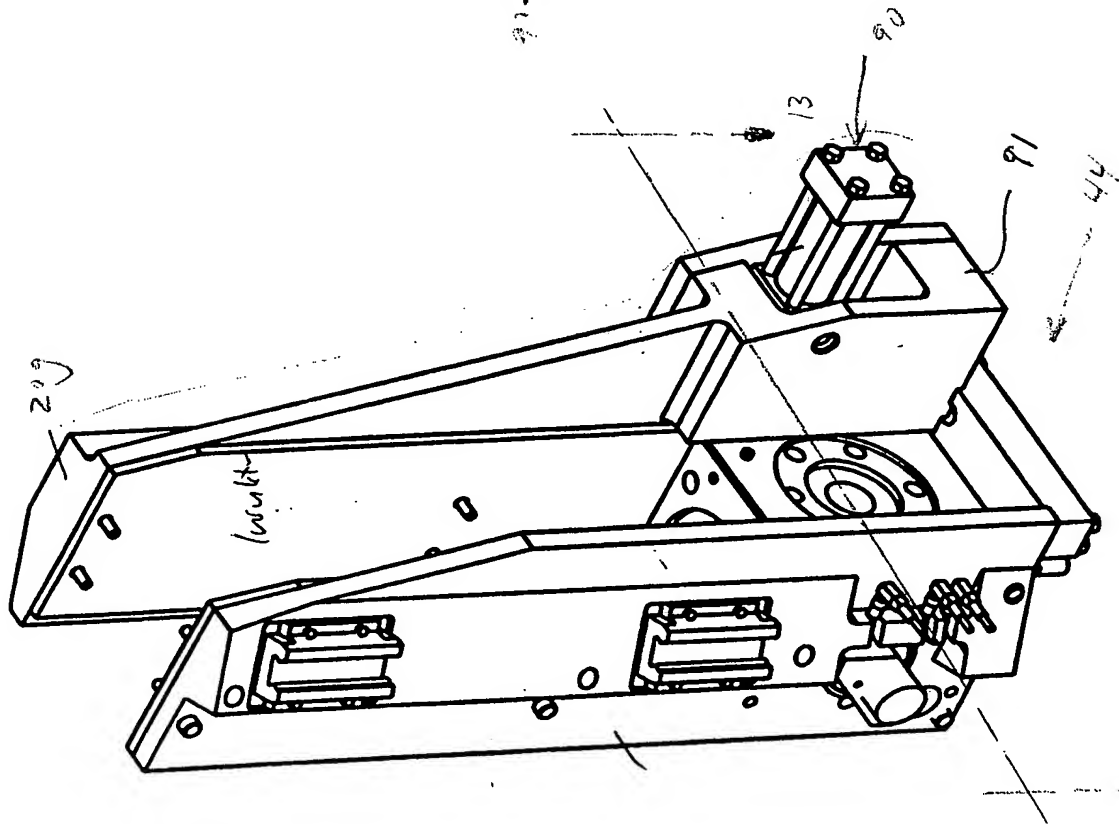


FIG. 12A

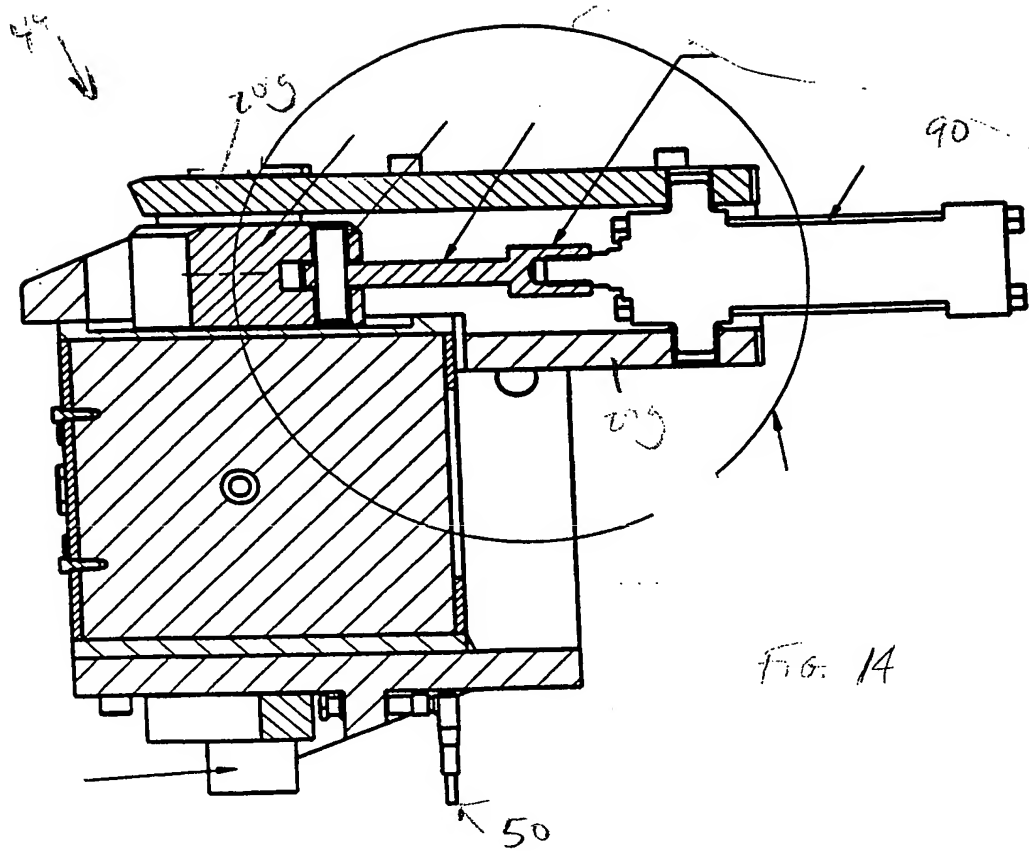
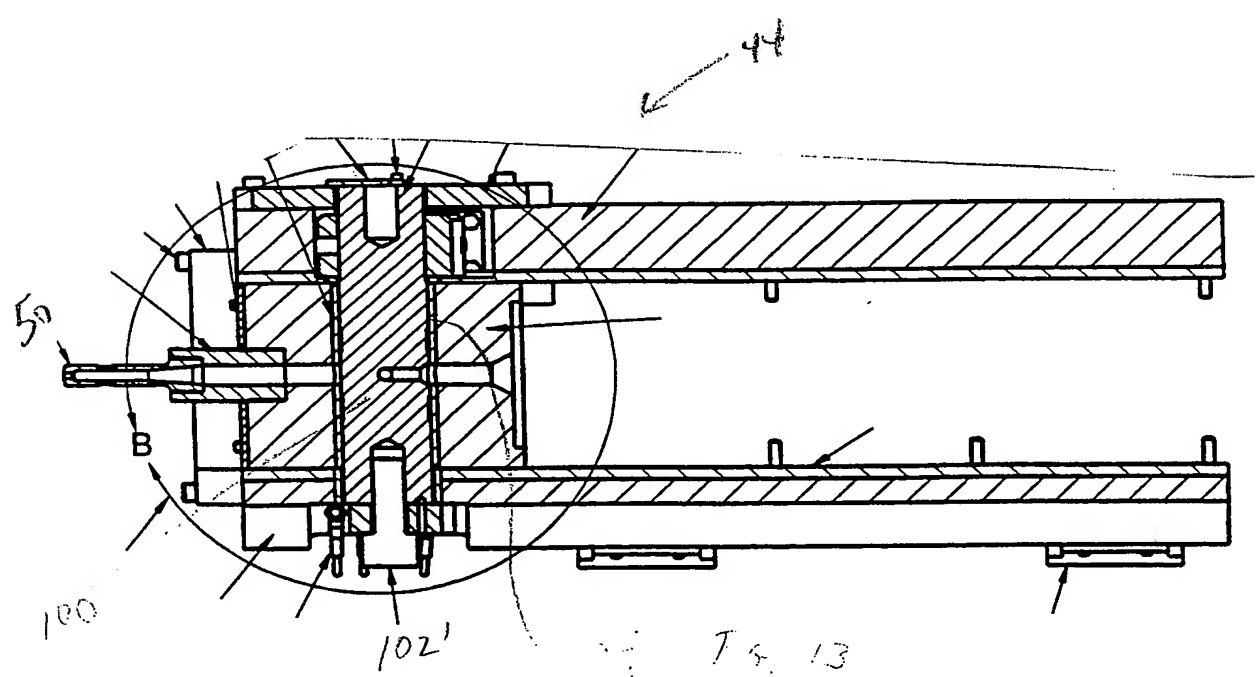
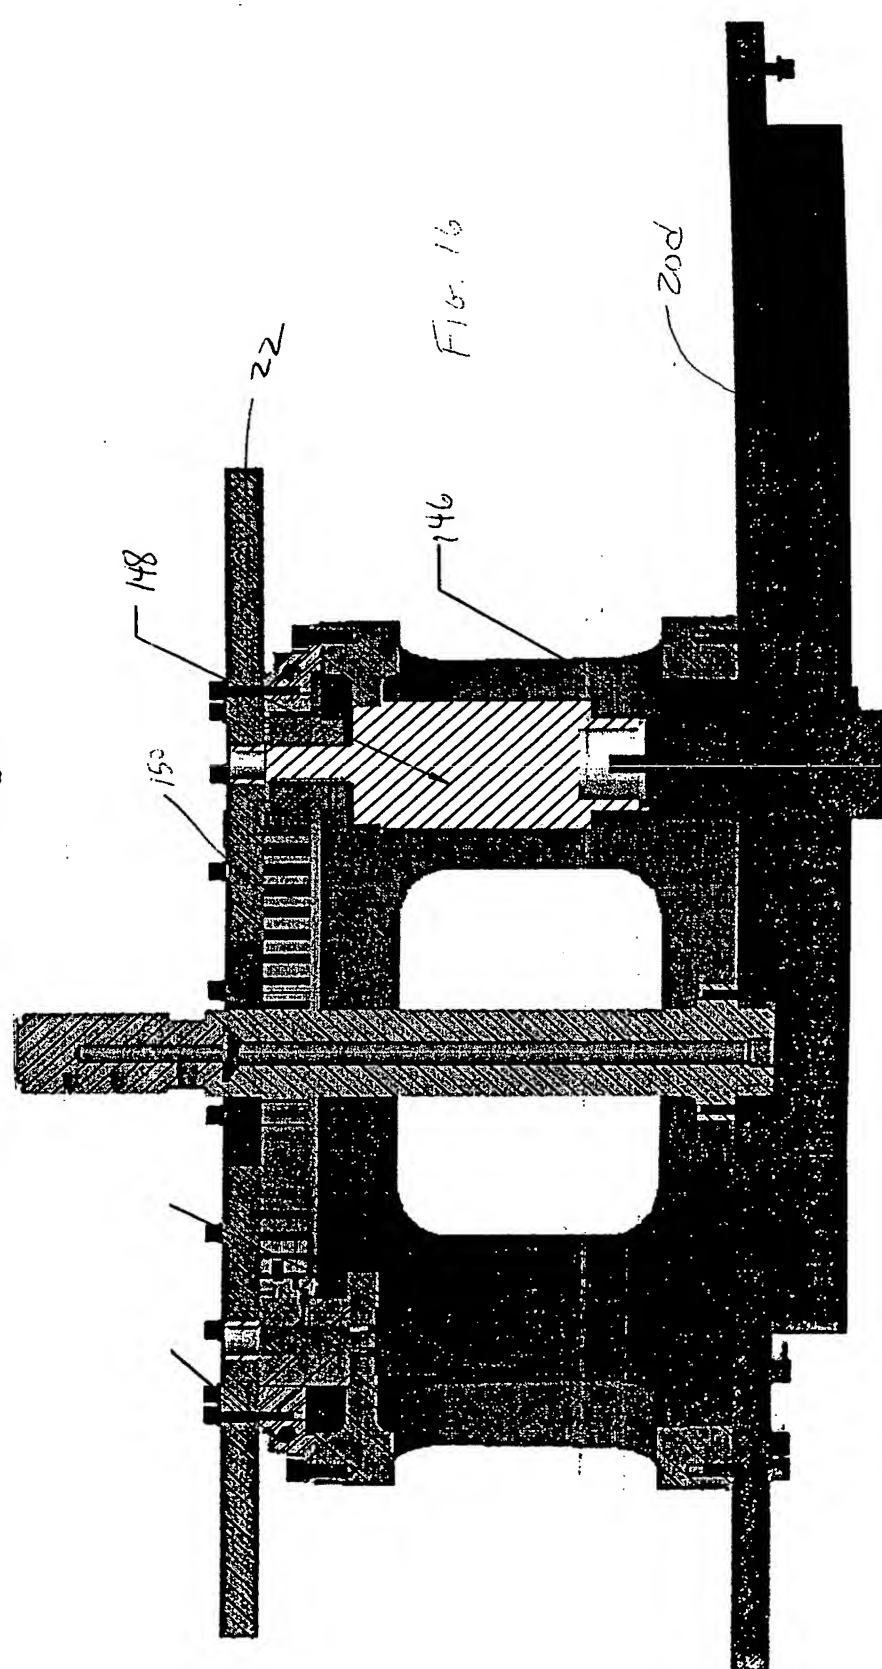
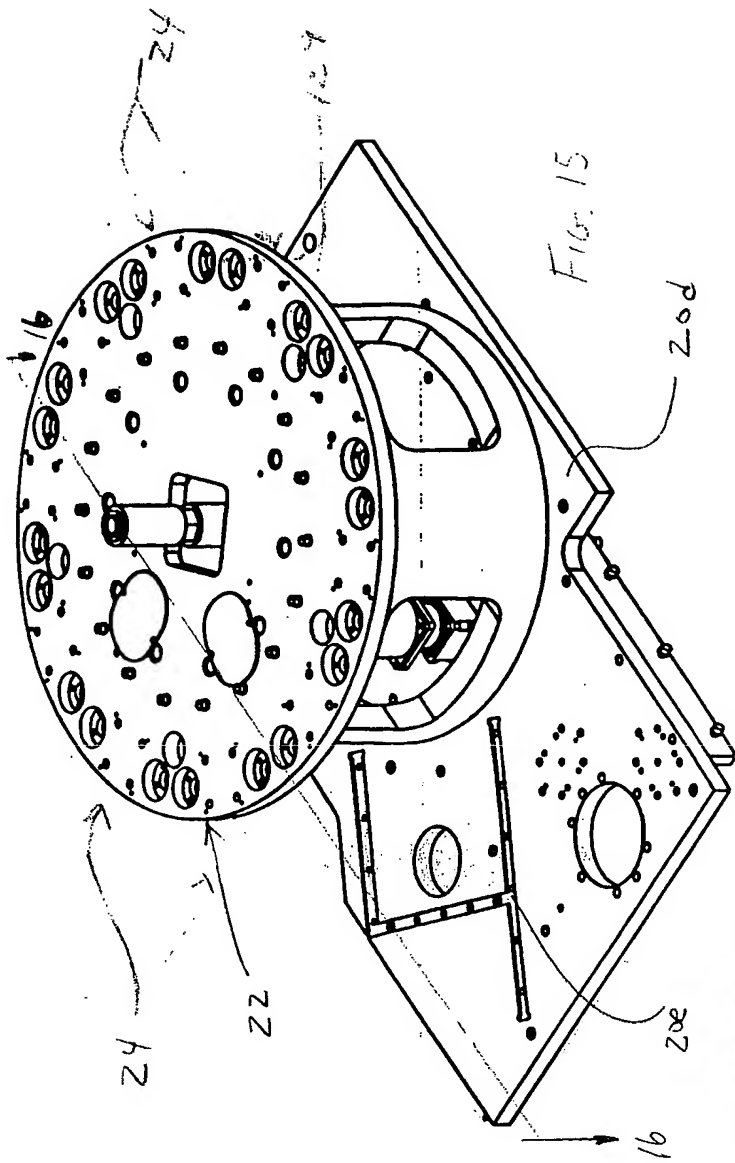


FIG. 14





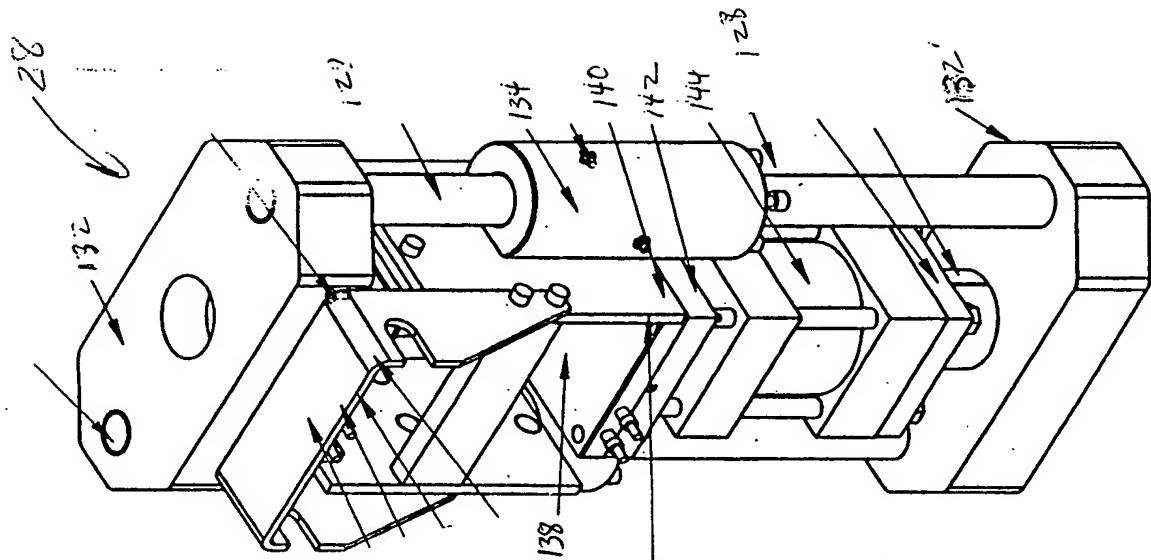


Fig. 18

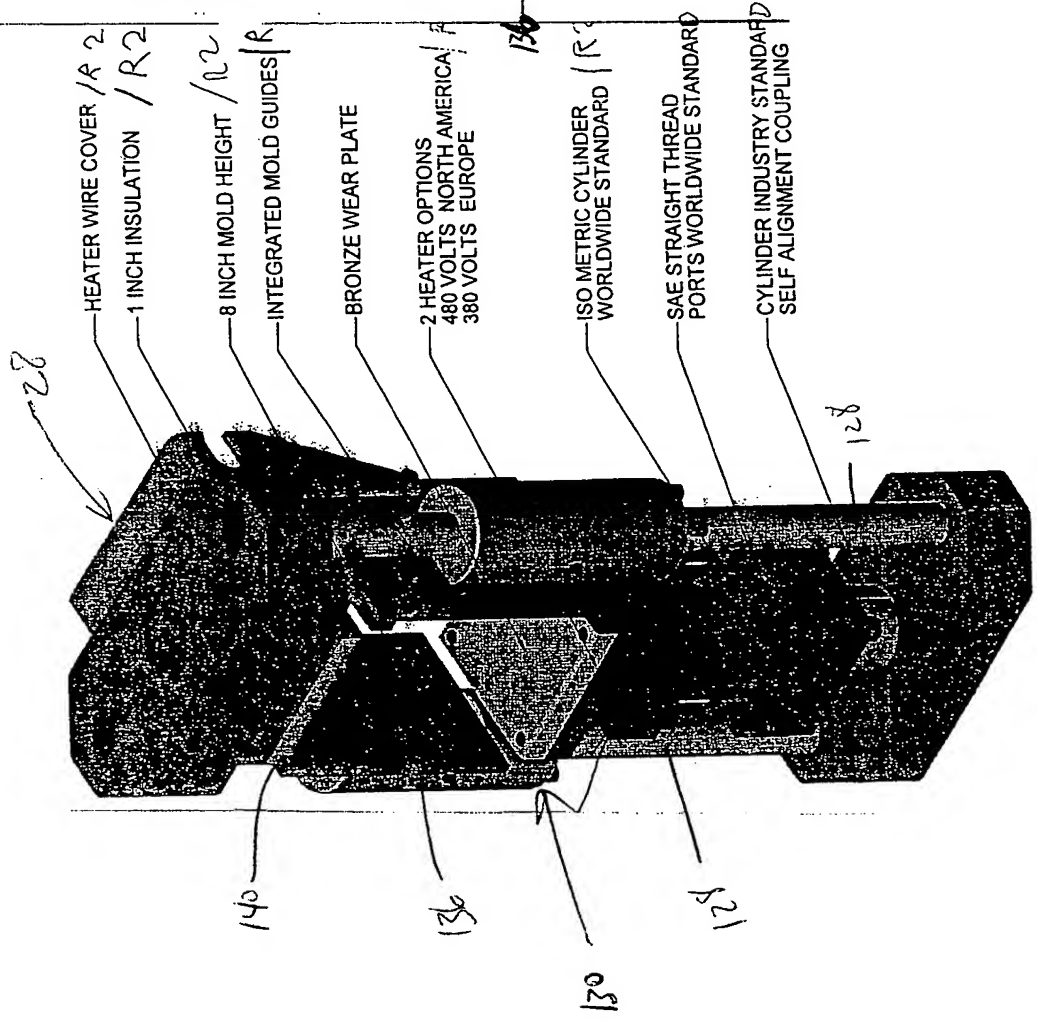
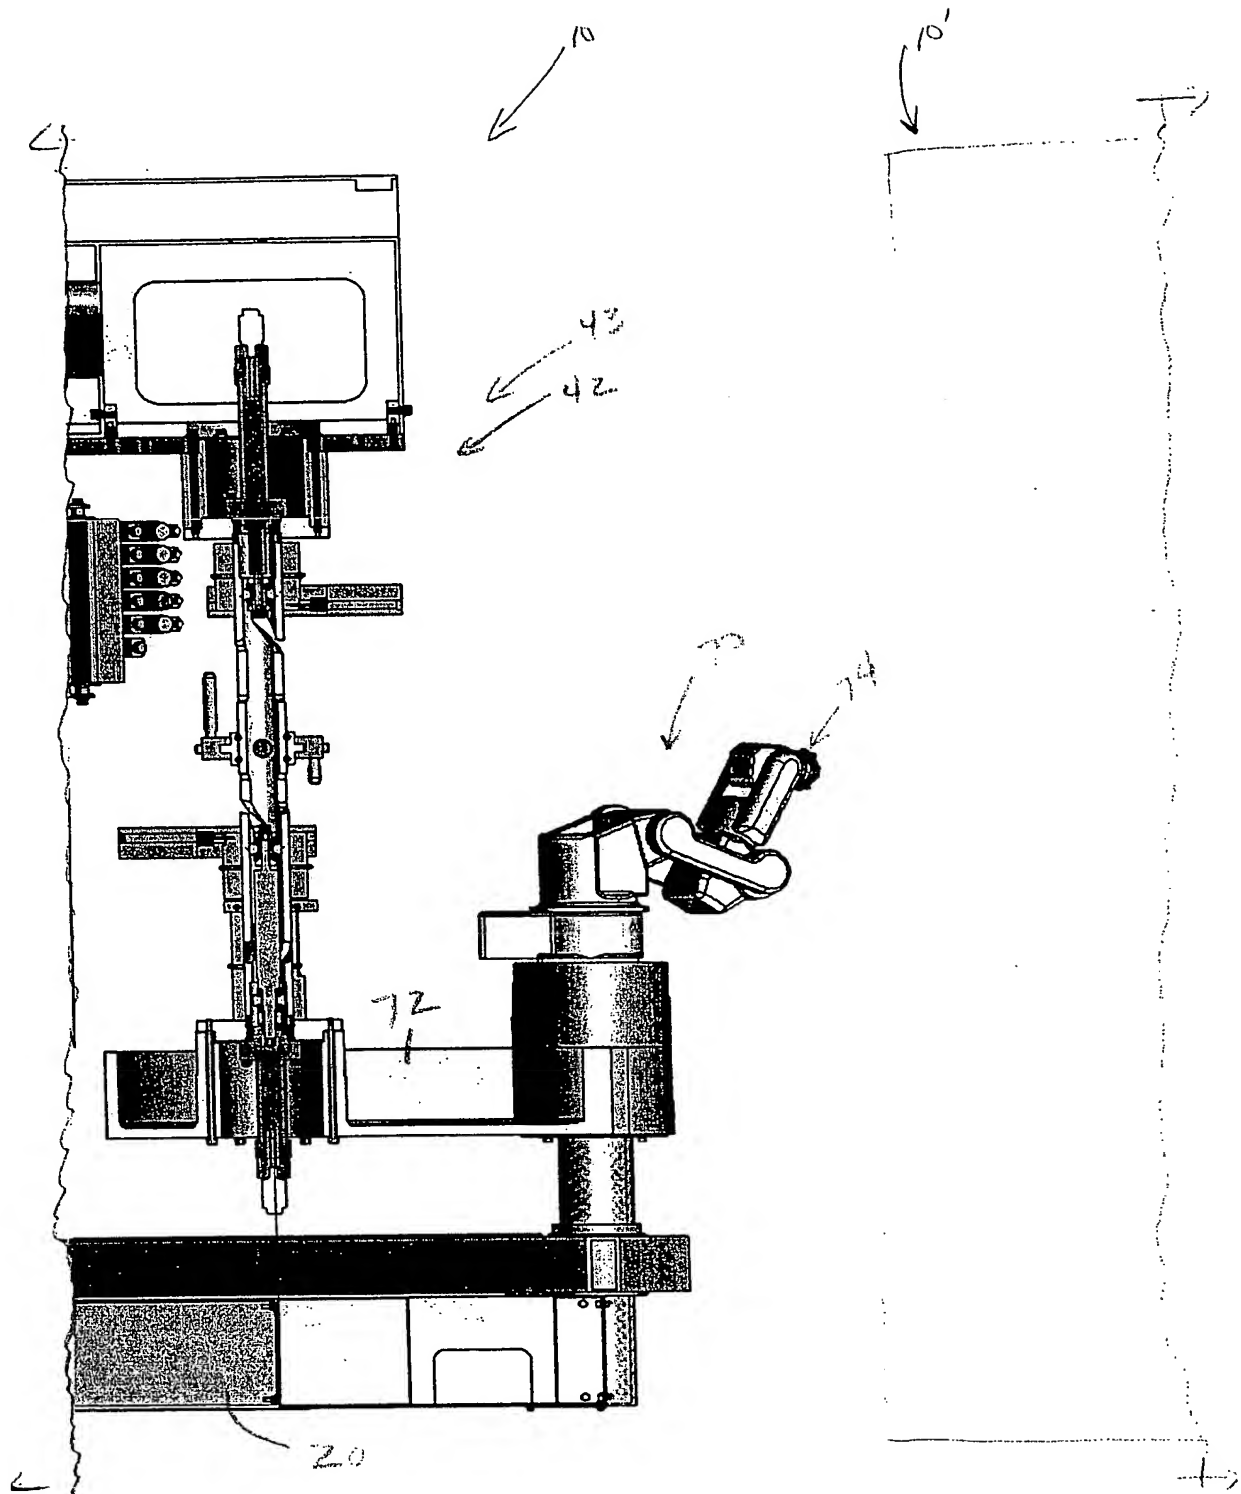


Fig. 17

- HEATER WIRE COVER / R 2
- 1 INCH INSULATION / R 2
- 8 INCH MOLD HEIGHT / R 2
- INTEGRATED MOLD GUIDES / R 1
- BRONZE WEAR PLATE
- 2 HEATER OPTIONS
480 VOLTS NORTH AMERICA / R 1
380 VOLTS EUROPE
- ISO METRIC CYLINDER
WORLDWIDE STANDARD / R 2
- SAE STRAIGHT THREAD
PORTS WORLDWIDE STANDARD
- CYLINDER INDUSTRY STANDARD
SELF ALIGNMENT COUPLING

Fig. 15



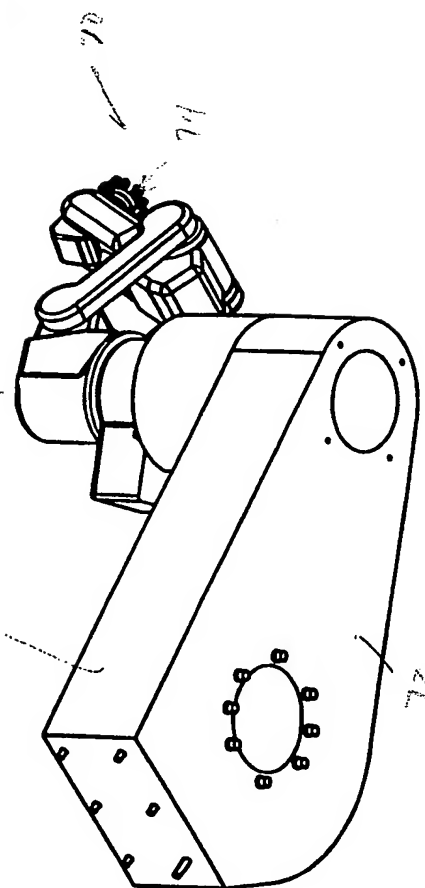
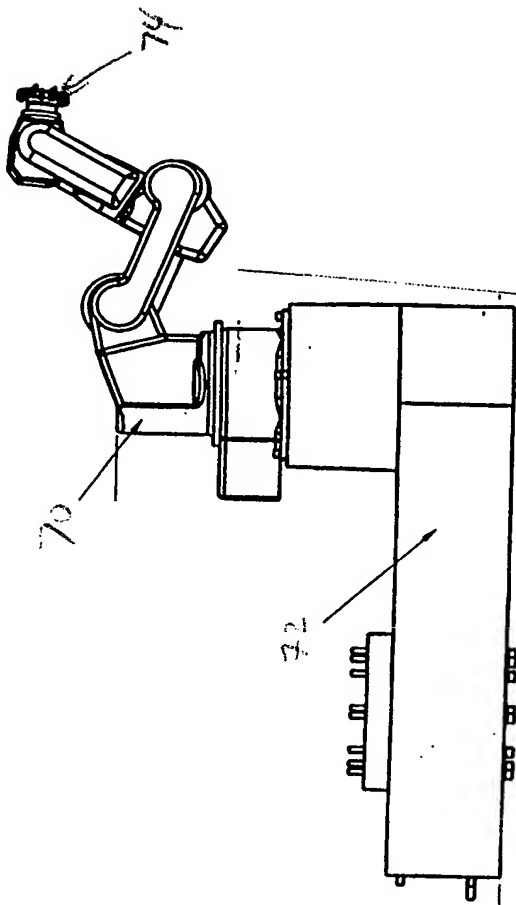


FIG. 21A

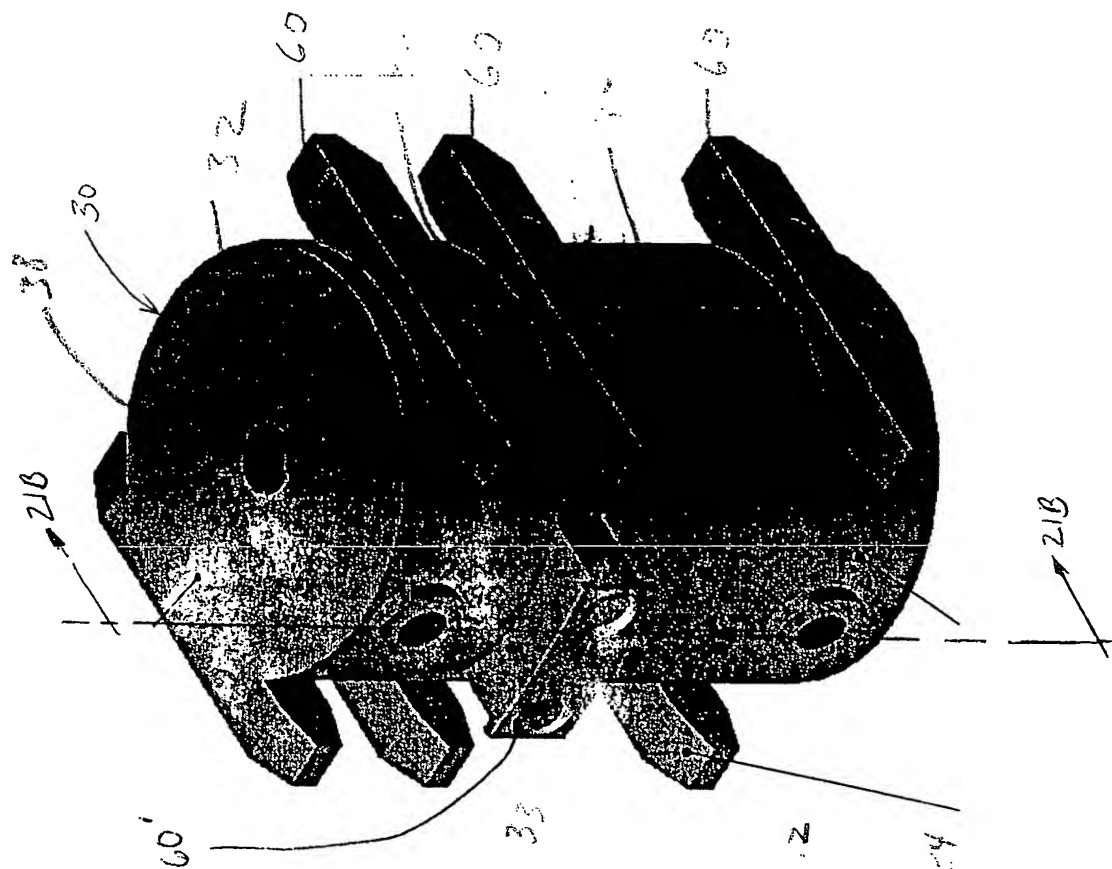
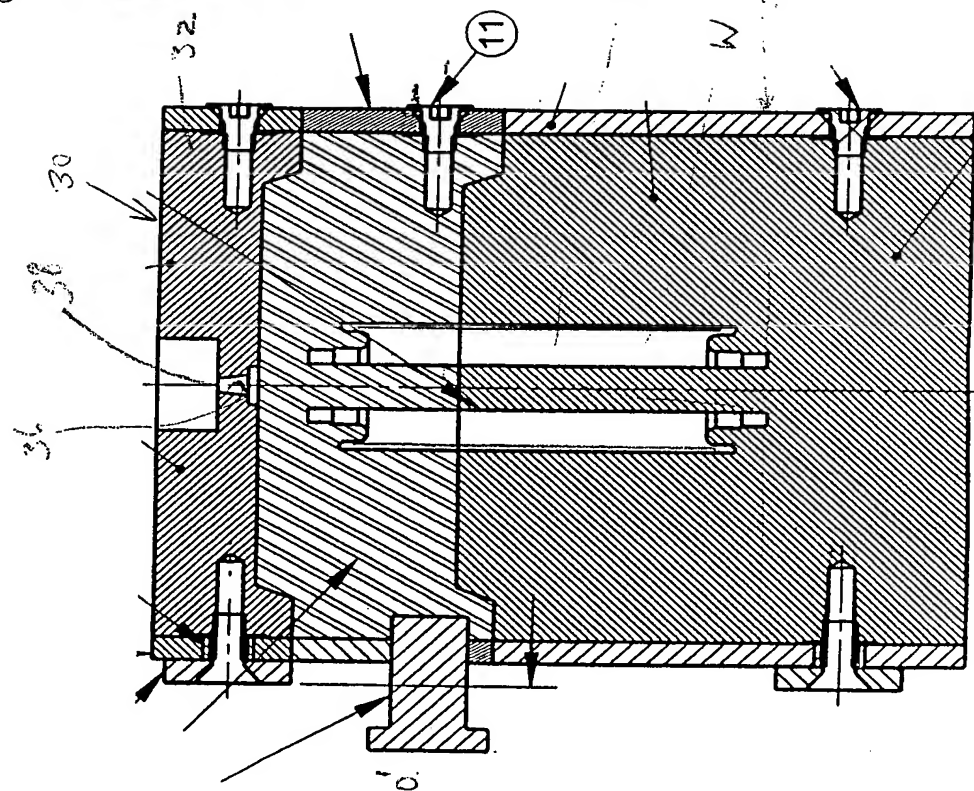
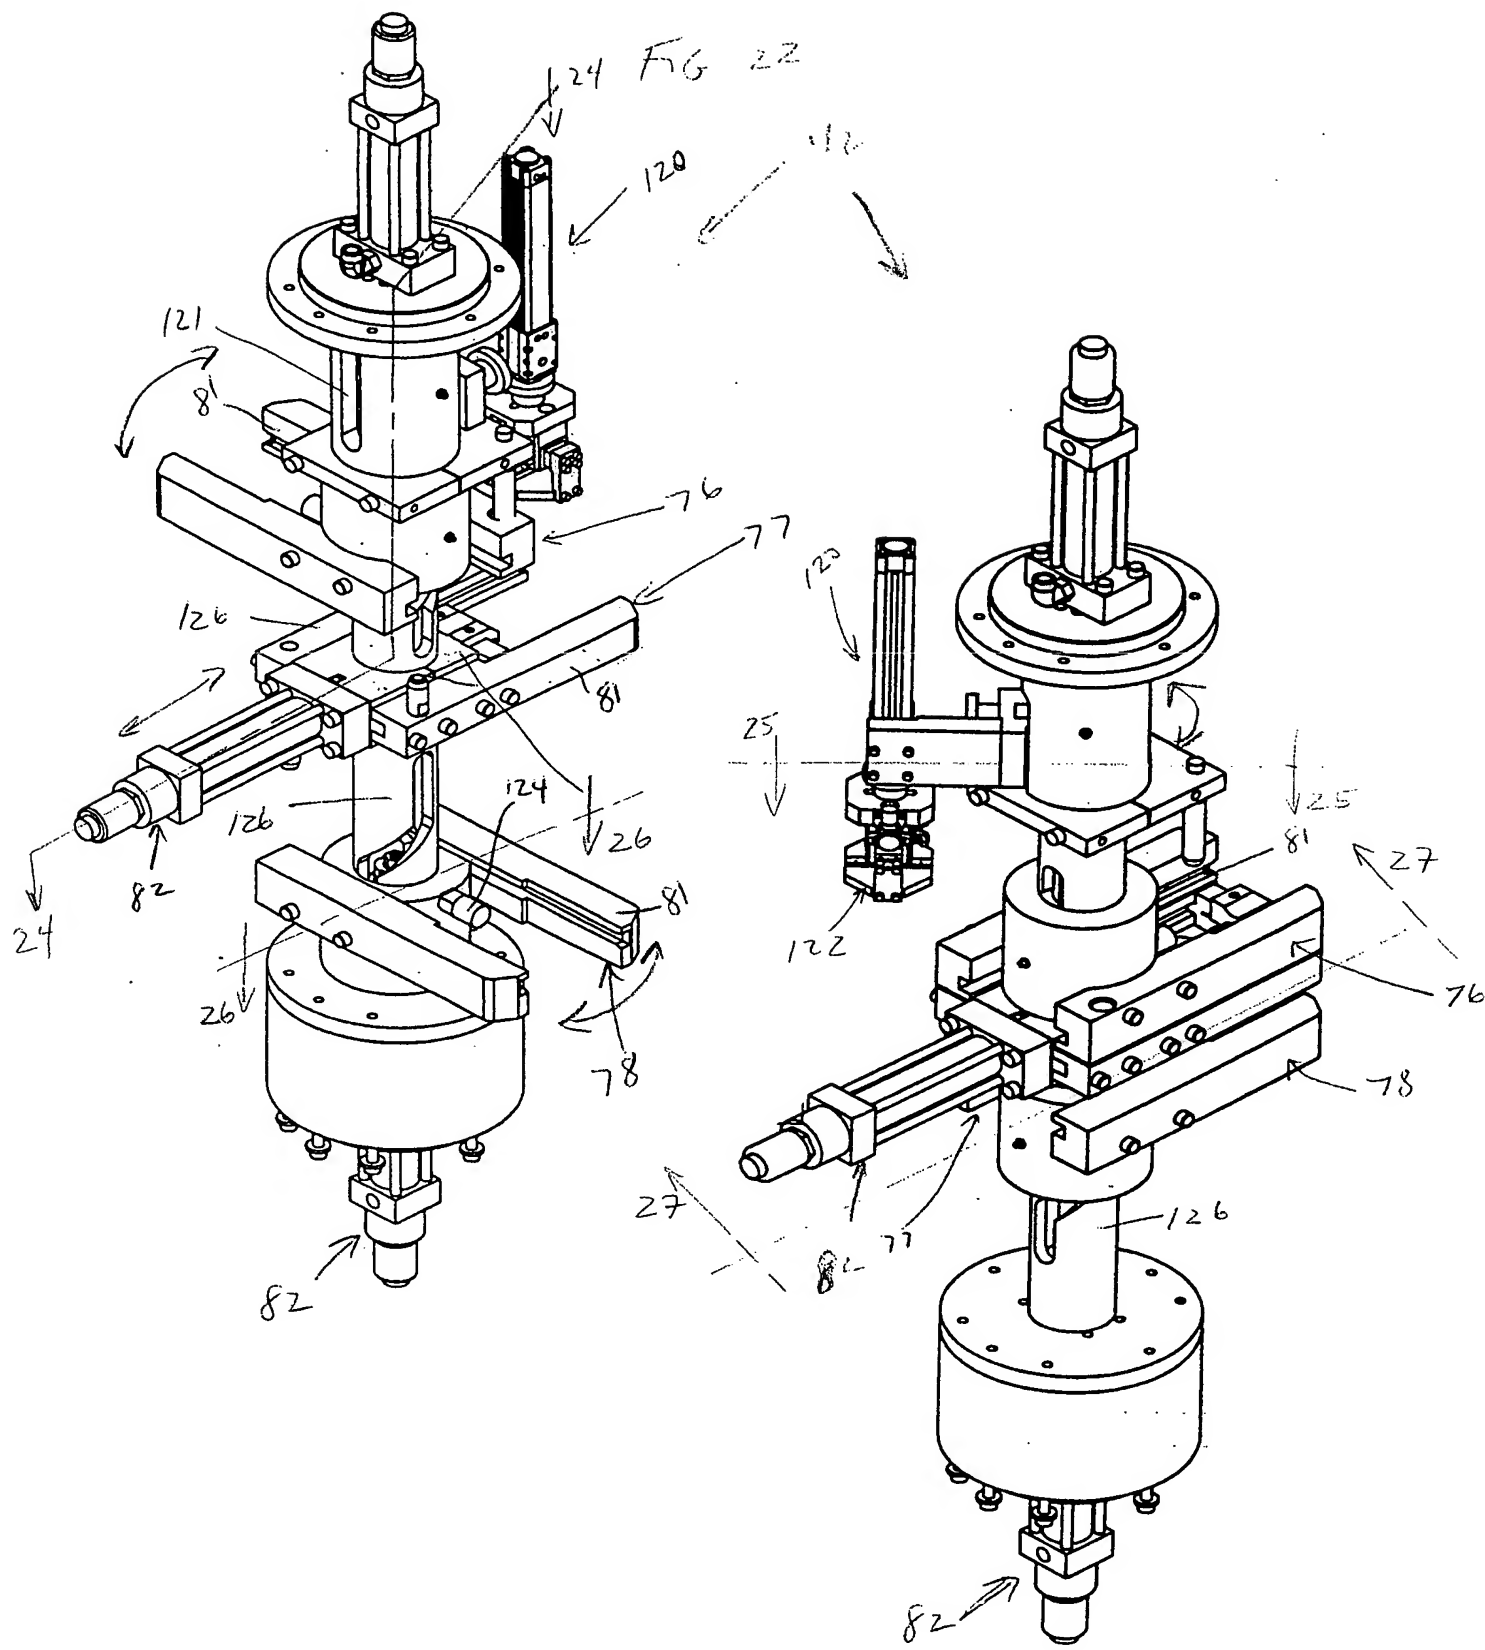
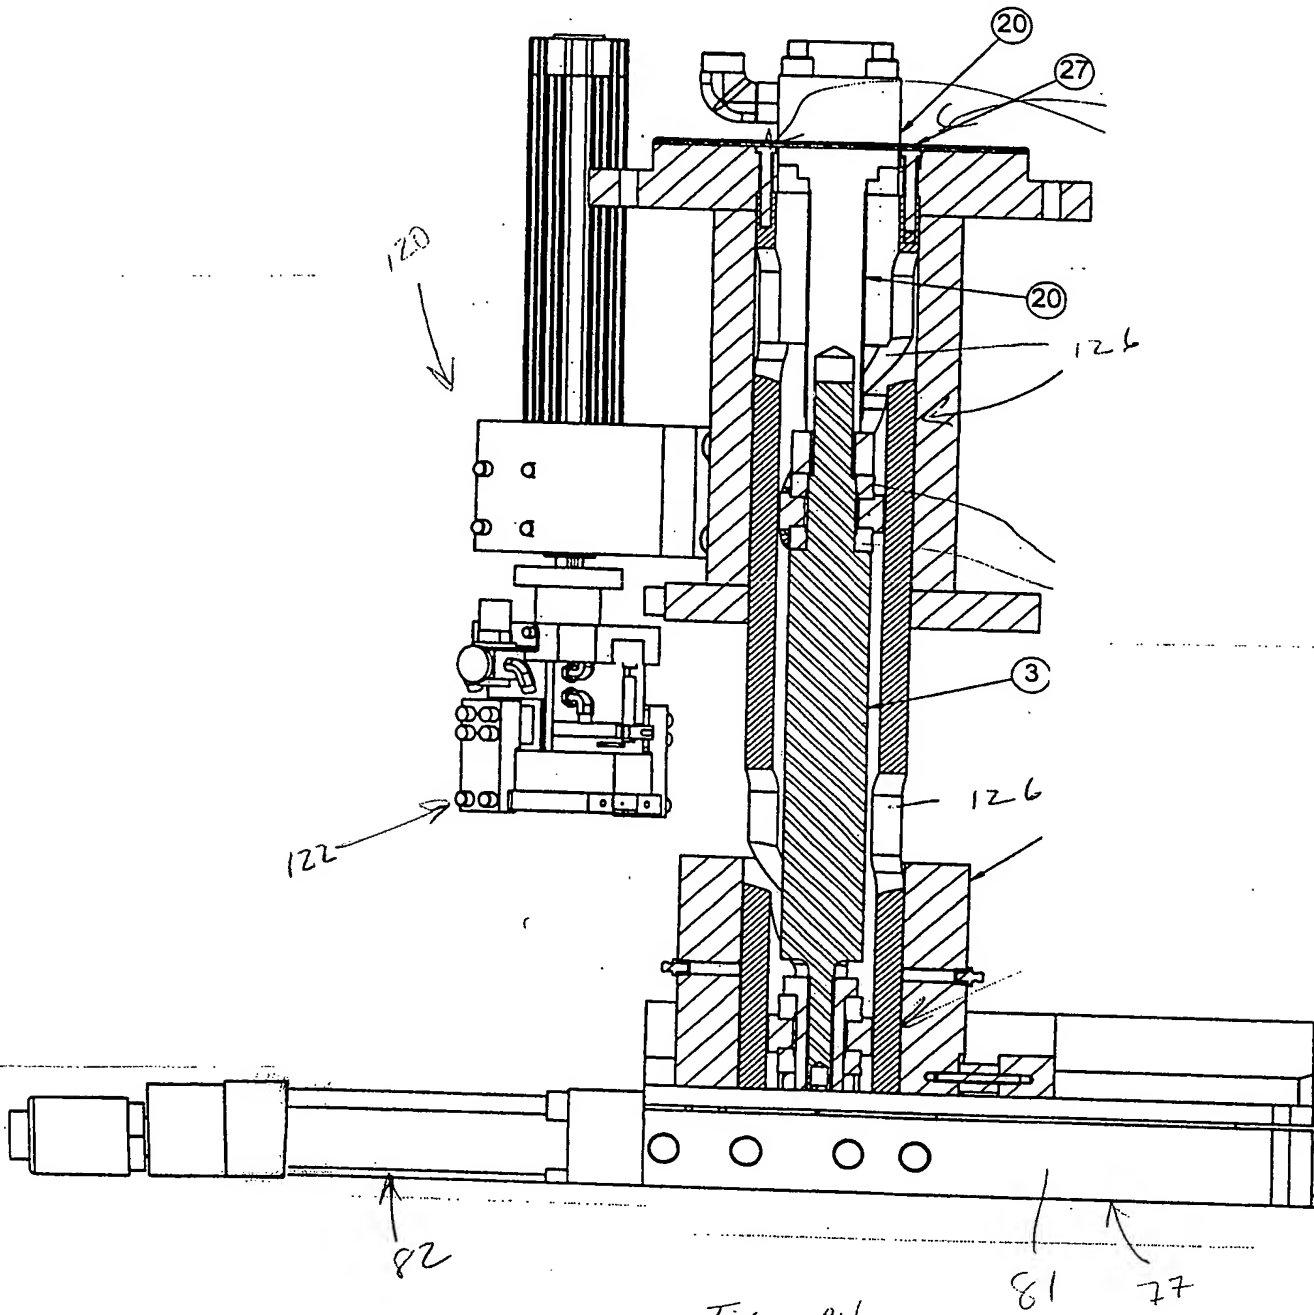


FIG. 21B







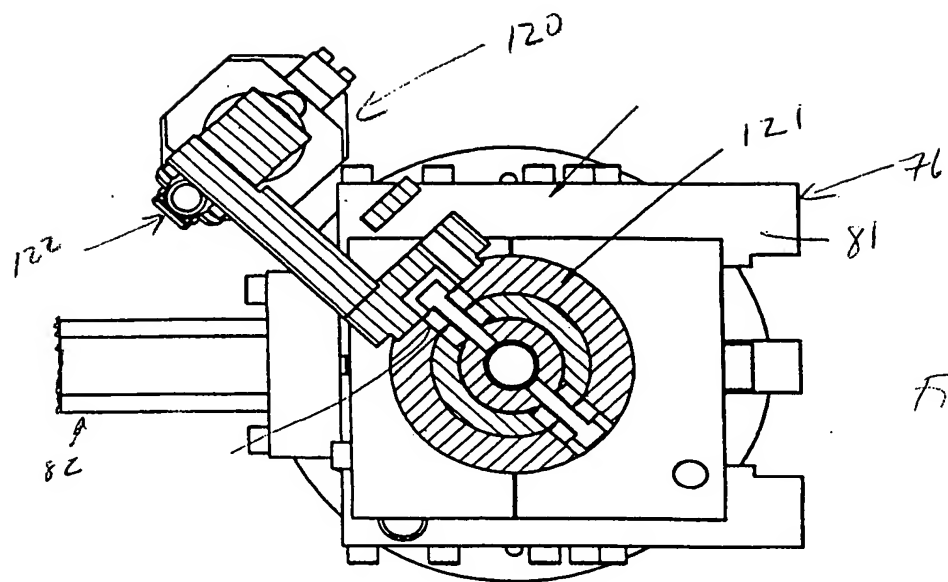


Fig. 25

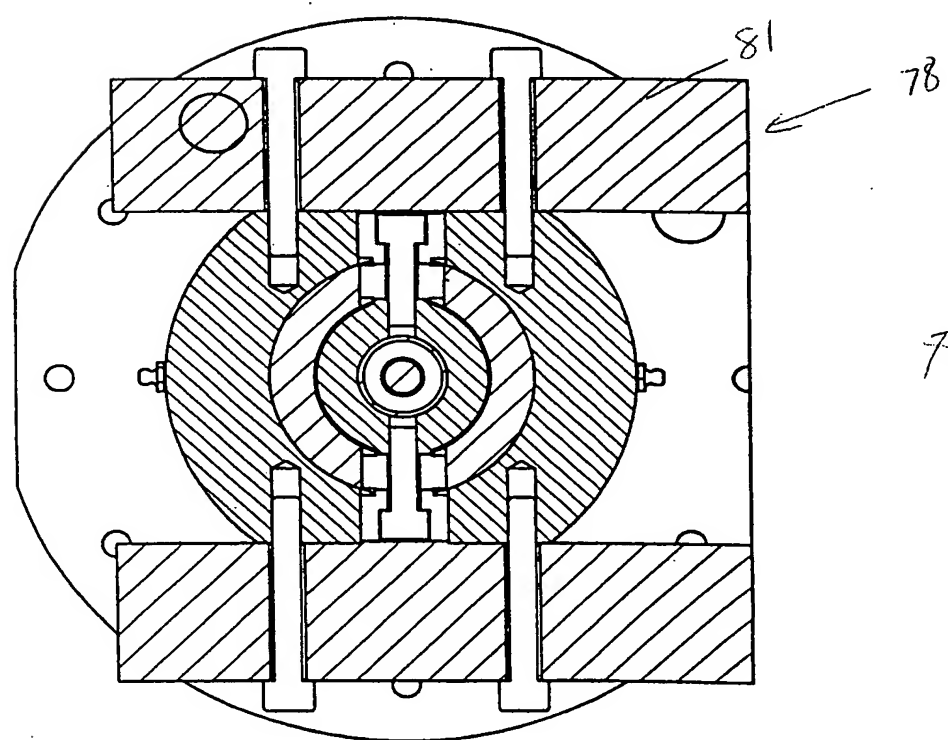
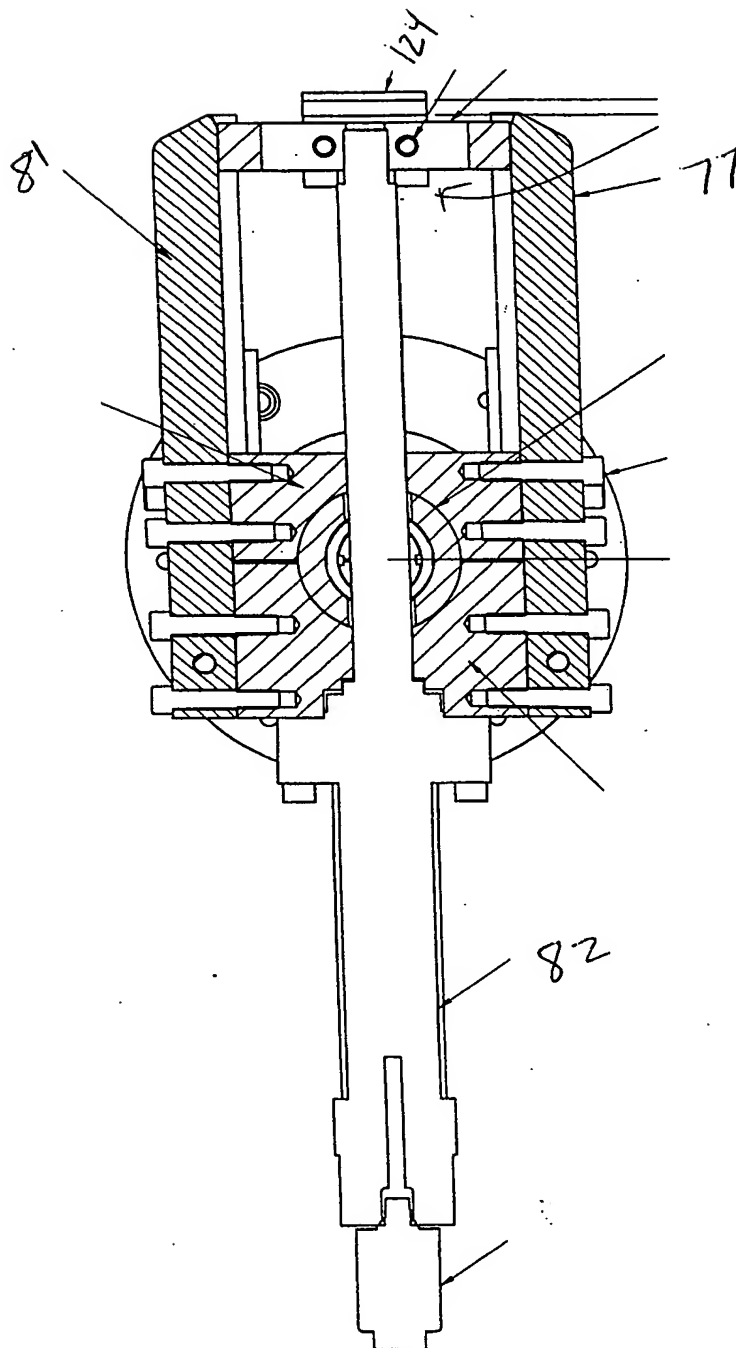


Fig. 26

Fig. 27



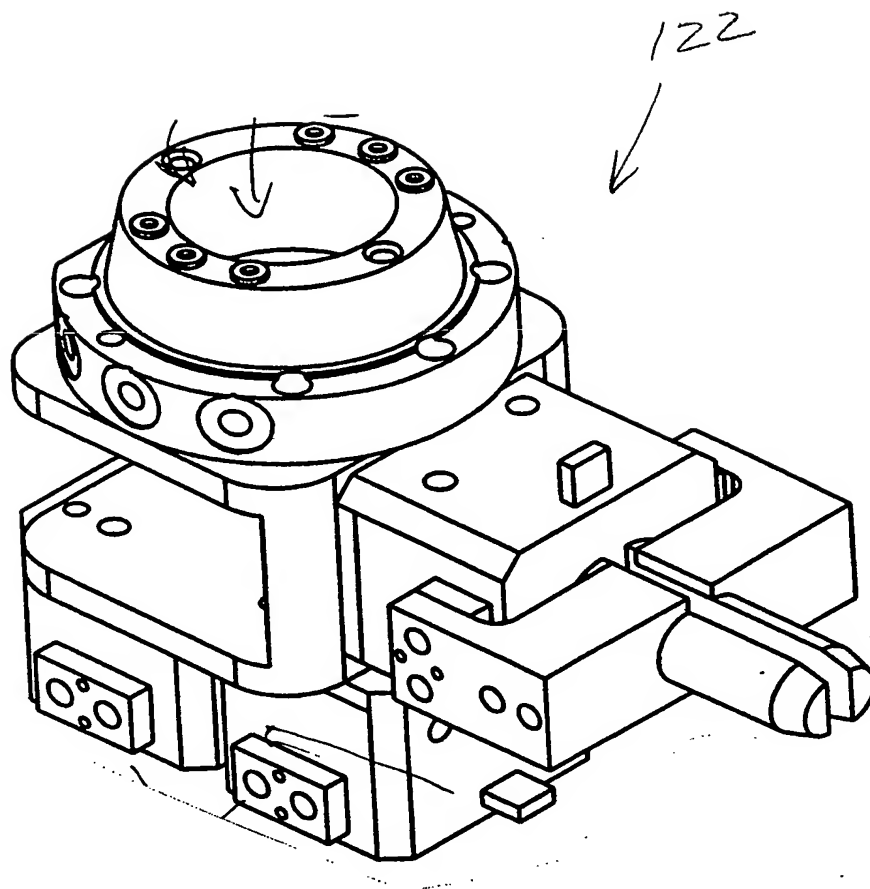


FIG. 28

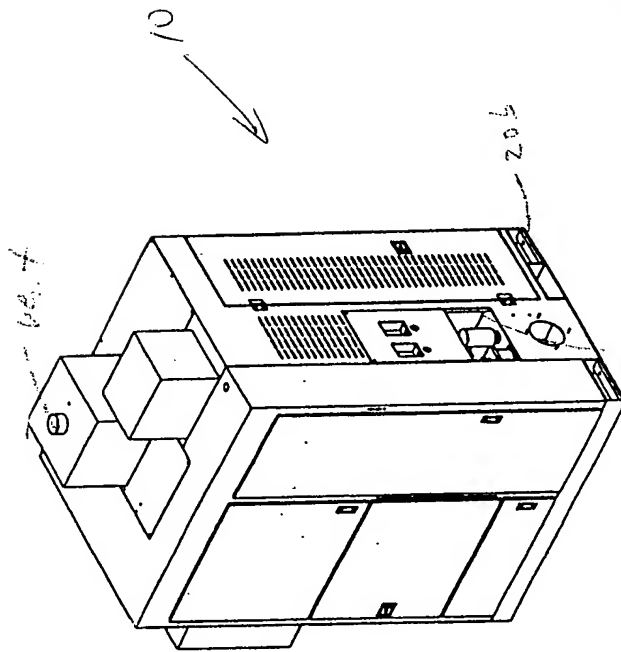


Fig. 27

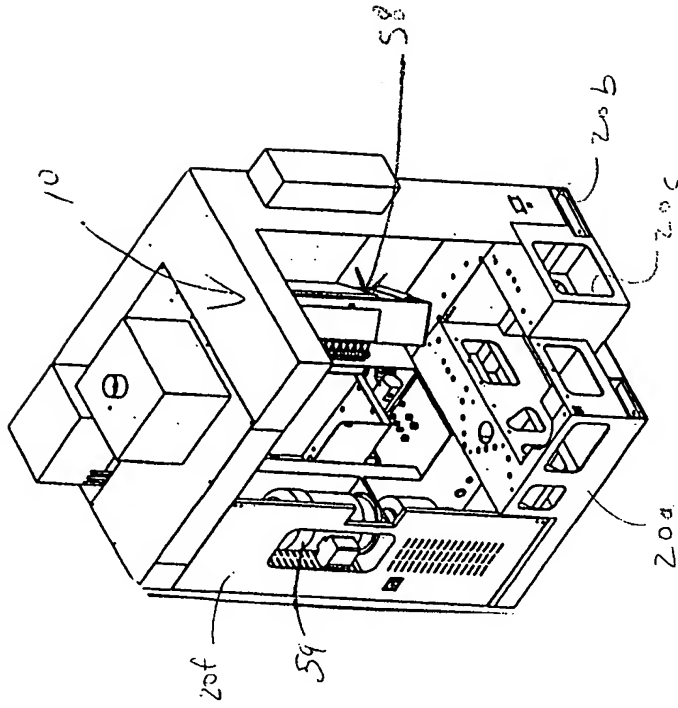


Fig. 29

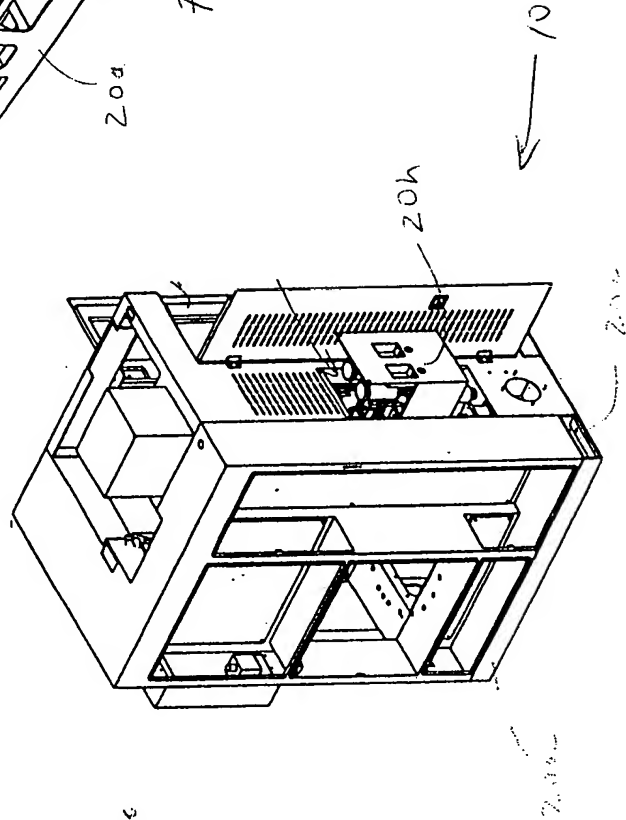


Fig. 31

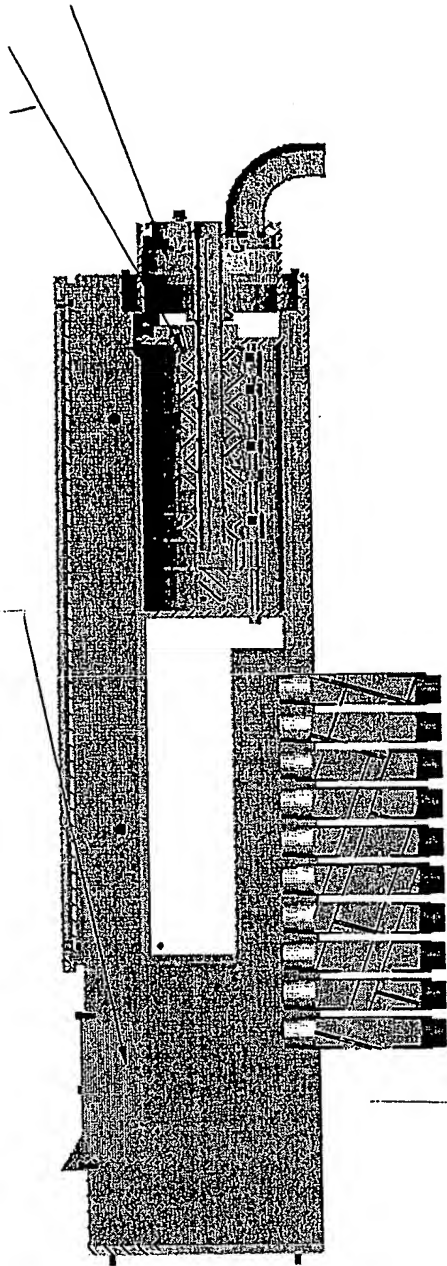


FIG. 33

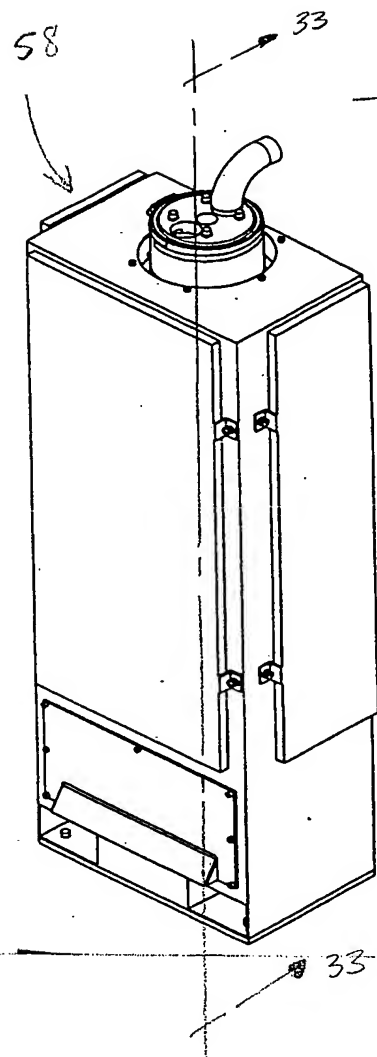


FIG. 32